

Using & Migrating to IPv6

Shumon Huque
University of Pennsylvania

LOPSA East Conference
New Brunswick, New Jersey, May 4th 2013



1

Using & Migrating to IPv6

© 2013 Shumon Huque.

Feedback, critique, suggestions on these slides gladly
received at <shuque @ upenn.edu>

Reminder: Please fill out the
evaluation forms for this course!


Who am I?

- An I.T. Director at the University of Pennsylvania
- Have also been:
 - Programmer (C, Perl, Python, Lisp)
 - UNIX Systems Administrator
 - Network Engineer
- Education: B.S. and M.S. (Computer Science) from Penn
- Also teach a Lab course on Network Protocols at Penn's School of Engineering & Applied Science

[Migrating to IPv6, LOPSA-East 13]

3

Who am I?

- Website: <http://www.huque.com/~shuque/>
- Blog: <http://blog.huque.com/>
- Twitter: <https://twitter.com/shuque> 
@shuque
- Google Plus:
 - <https://plus.google.com/105308234918217701741/posts>

[Migrating to IPv6, LOPSA-East 13]

4

My IPv6 experience

- Roughly a decade of hands on experience
- Have been running production IPv6 network infrastructure since 2002
 - 2002: MAGPI (Mid-Atlantic GigaPoP in Philadelphia for Internet2)
 - 2005: University of Pennsylvania campus network
 - Various application services at Penn (DNS, NTP, HTTP, XMPP, LDAP, Kerberos, etc)

[Migrating to IPv6, LOPSA-East 13]

5

Course Topics *(roughly)*

1. IPv6 Motivation
2. IPv6 Addressing and Protocol
3. IPv6 support in service providers
4. IPv6 support in Operating Systems
5. IPv6 support in Applications
6. IPv6 Tunneling
7. Address Selection
8. IPv6 and Security
9. Troubleshooting & debugging tools
10. Transition & Co-existence mechanisms
11. Parting advice for IPv6 deployers

Bonus Material:

12. Programming Introduction
13. Routing Protocols & other network stuff
14. Router configuration examples

[Migrating to IPv6, LOPSA-East 13]

6

IPv6 Motivation

[Migrating to IPv6, LOPSA-East 13]

7

World IPv6 Launch

- <http://www.worldipv6launch.org/>

6 JUNE 2012

Major Internet service providers (ISPs), home networking equipment manufacturers, and web companies around the world are coming together to permanently enable IPv6 for their products and services by 6 June 2012.


- Google, Facebook, Netflix, Yahoo!, MS Bing, ...
- ISPs: Comcast, AT&T, Free Telecom, Time Warner, ...
- CDNs: Akamai, Limelight, ...
- Some universities, corporations, government agencies,



[Migrating to IPv6, LOPSA-East 13]

8

<http://www.google.com/intl/en/ipv6/statistics.html>

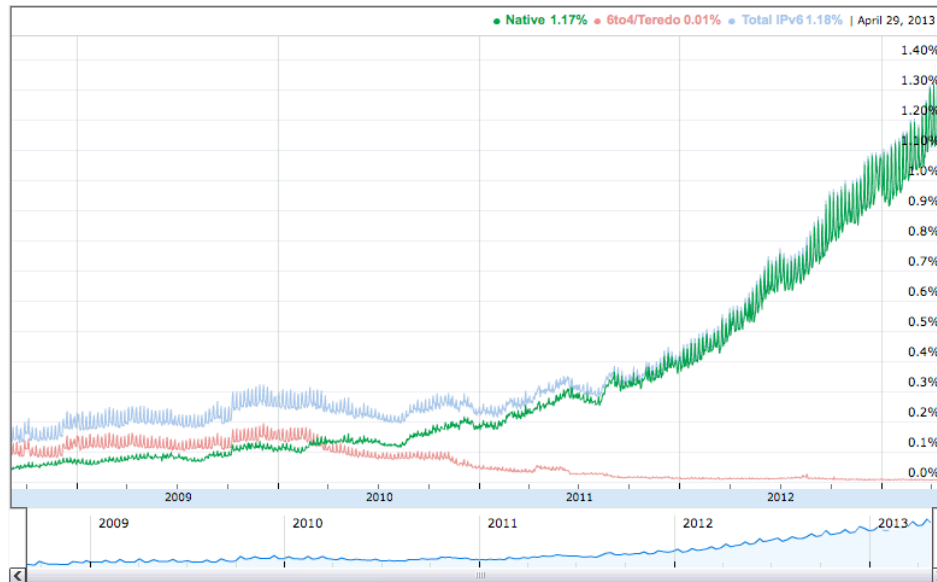

Also see <http://www.worldipv6launch.org/measurements/>
And <http://www.vyncke.org/ipv6status/>

[Migrating to IPv6, LOPSA-East 13]

9

IPv6: Internet Protocol v6

- Version 6: The next generation Internet Protocol
- Much larger address space: 128 bits vs 32 bits
 - (Note: not 4x larger, but 2^{96} times larger!)
- No NAT (goal: restore end-to-end architectural model)
- Scalable routing (we'll talk about multihoming later)
- Other: header simplification, NDP (a better version of ARP), auto-configuration, flow labelling, and more ..
- Note: *IPv6 is not backwards compatible with IPv4*

[Migrating to IPv6, LOPSA-East 13]

10

IPv6: Internet Protocol v6

- But primary impetus is the much larger address space
- Impending exhaustion of IPv4 addresses
- But Internet continues to grow
 - Not only in terms of the number of users, but also in the number and range of devices being connected to the network
 - The “*Internet of Things*”

[Migrating to IPv6, LOPSA-East 13]

11

IPv6: Internet Protocol v6

- Adverse consequences of not deploying IPv6:
- IPv4 transfer markets (sanctioned or unsanctioned)
 - March 2011: Microsoft acquired block of 600,000 addresses from Nortel for \$7.5 million (\$11.25/address)
 - December 2011: Borders books sold a /16 to Cerna for \$786,432 (\$12.00/address)
 - Rise of brokering companies: Addrex, Kalorama, Hilco streambank etc
- More and more layers of NAT
- Balkanization & resulting disruption of universal connectivity

[Migrating to IPv6, LOPSA-East 13]

12

Transition vs Co-existence

- IPv4 isn't going away anytime soon, possibly not for many decades
- So, for most folks, already connected to the IPv4 Internet, **we are not (yet) transitioning to IPv6**
- We are **deploying IPv6 to co-exist with IPv4**
- To allow us to communicate with both the IPv4 and IPv6 Internet
- Note: some people in the near future will be moving directly to IPv6 though, due to IPv4 depletion

[Migrating to IPv6, LOPSA-East 13]

13

IPv6: Brief History

- Design work began by IETF in 1993, to deal with projected depletion of IPv4 addresses (then ~ 2010-2017)
- Completed in ~1999
 - RFC 1883: first version of IPv6 specification (Dec 1995)
 - RFC 2460: Internet Protocol version 6 specification (Dec 1998)
- April 1999: first RIR allocation of IPv6 address space
- By now hundreds of RFCs exist, describing various aspects of IPv6 and its applications

[Migrating to IPv6, LOPSA-East 13]

14

IP address allocation

- IANA (Internet Assigned Numbers Authority)
 - Top level allocator of IP address blocks
 - Usually allocates to “Regional Internet Registries” (RIR)
- 5 RIRs, serving distinct geographic regions:
 - ARIN, RIPE, LACNIC, APNIC, AFRINIC
- RIRs allocate to large Internet Service Providers (ISPs), and some large organizations
- Large ISPs allocate to smaller entities (other ISPs, enterprises etc)

[Migrating to IPv6, LOPSA-East 13]

15

from <http://ip4.potaroo.net> (Geoff Huston, APNIC)

(from April 29th 2013)

IANA Unallocated Address Pool Exhaustion:

03-Feb-2011

Depleted already!

Projected RIR Address Pool Exhaustion Dates:

RIR	Projected Exhaustion Date	Remaining Addresses in RIR Pool (/8s)
APNIC:	19-Apr-2011 (actual)	0.8703
RIPE NCC:	14-Sep-2012 (actual)	0.9055
ARIN:	10-Apr-2014	2.3664
LACNIC:	26-Aug-2014	2.5304
AFRINIC:	31-Jul-2020	3.7310

See https://www.arin.net/resources/request/ipv4_countdown.html

Some other projections for ARIN are more pessimistic. See for example Tony Hain's: <http://tndh.net/~tony/ietf/ARIN-runout-projection.pdf>

[Migrating to IPv6, LOPSA-East 13]

16

View of IPv4 /8's (1st octet)

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31
32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47
48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63
64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79
80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95
96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111
112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127
128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143
144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159
160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175
176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191
192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207
208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223
224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239
240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255

[Migrating to IPv6, LOPSA-East 13]

[Red = not publicly usable]

Special use IPv4 addresses

0.0.0.0/8	Source hosts on this net
10.0.0.0/8	RFC 1918 private address space
100.64.0.0/10	Shared address space for transition mechanisms
127.0.0/8	Loopback addresses block
169.254.0.0/16	Link Local address block (rfc 3927)
172.16.0.0/12	RFC 1918 private address space
192.0.0.0/24	IANA reserved (protocol assignments)
192.0.0.0/29	DS-Lite
192.0.2.0/24	TEST-NET-1: documentation and example code
192.88.99.0/24	6to4 Relay anycast addresses
192.168.0.0/16	RFC 1918 private address space
192.18.0.0/15	Benchmarking
192.51.100.0/24	TEST-NET-2
203.0.113.0/24	TEST-NET-3
224.0.0.0/4	Class D: IP Multicast address range
240.0.0.0/4	Class E: Reserved address range for future use

[Migrating to IPv6, LOPSA-East 13]

See RFC 6890 for details

What you need to deploy IPv6

- Obtain IPv6 address space
 - from your RIR or ISP
- IPv6 connectivity (preferably native) from your ISP
- IPv6 deployment in network infrastructure, operating systems, and applications (may require upgrades)
- IT staff and customer service training

[Migrating to IPv6, LOPSA-East 13]

19

IPv6 addressing and protocol details

[Migrating to IPv6, LOPSA-East 13]

20

IPv4 addresses

- Example: 192.168.7.13
- 32 bits
- “Dotted Quad notation”
- Four 8-bit numbers (“octets”) in range 0..255, separated by dots
- $2^{32} = 4.3$ billion (approximate) possible addresses
 - *(Usable number of addresses much lower though: routing & subnet hierarchies - see RFC 3194 - Host Density ratio)*

[Migrating to IPv6, LOPSA-East 13]

21

IPv6 addresses

- 128-bits (four times as large)
- 8 fields of 16 bits each (4 hex digits) separated by colons (:)
- [Hex digits are: 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, a, b, c, d, e, f]
- 2^{128} possible addresses (an incomprehensibly large number)

2001:0db8:3902:00c2:0000:0000:0000:fe04

($2^{128} = 340,282,366,920,938,463,463,374,607,431,768,211,456$)

[Migrating to IPv6, LOPSA-East 13]

22

IPv6 addresses

- Zero suppression & compression for more compact format
 - Suppress (omit) leading zeros in each field
 - Replace consecutive fields of all zeros with a double colon (::) - only one sequence of zero fields can be compressed this way

2001:0db8:3902:00c2:0000:0000:0000:fe04



2001:db8:3902:c2::fe04

[Migrating to IPv6, LOPSA-East 13]

23

IPv6 canonical form

- RFC 5952: A recommendation for IPv6 Text Representation
- Same address can be represented many ways in IPv6, making it more challenging to do some tasks (searching, pattern matching, programmatic processing of the text forms, etc)
- Define a (recommended) canonical text representation
 - must suppress leading zeroes in a field
 - Use :: to compress only the longest sequence of zero fields, and only the first one if there are multiple equal length sequences
 - Compression of a single zero field is not allowed
 - a, b, c, d, e, f must be in lower case

[Migrating to IPv6, LOPSA-East 13]

24

IPv4 mapped IPv6 address

Uses prefix `::ffff:0:0/96`

(`0:0:0:0:0:ffff:0:0/96`)

Example `::ffff:192.0.2.124`

- Used for handling IPv4 connections on an IPv6 socket
- Note slightly different text representation to make it easier to embed 32-bit IPv4 address in the IPv6 address
- See RFC 4038 for details (“Application aspects of IPv6 transition”)
- Not normally seen on wire (only IPv4 packets seen)

[Migrating to IPv6, LOPSA-East 13]

25

IPv6 in URLs

- To represent literal IPv6 addresses in Uniform Resource Locators (URL), enclose the address in square braces:
 - `http://[2001:db8:ab:cd::3]:8080/index.html`
 - `ldap://[2001:db8:ab:cd::4]/`
 - `ftp://[2001:db8:ab:cd::5]/blah.txt`
- See RFC 3986 for details [URI: Generic Syntax]
- (This is generally only needed for debugging and diagnostic work)

[Migrating to IPv6, LOPSA-East 13]

26

IPv6 network prefixes

- Format: IPv6-Address / prefix-length
- 2001:db8::/32
- 2001:db8:ab23::/48 (typical org assignment)
- 2001:db8:ab23:74::/64 (most subnets)
- 2001:db8:ab23:74::2/64
- 2001:db8:ab23:75::1/127 (p2p links by some)
- 2001:db8:ab23:76::a/128 (loopback)

[Migrating to IPv6, LOPSA-East 13]

27

IPv6 DNS records

- **AAAA** (“**Quad-A**”) DNS record type is used to map domain names to IPv6 addresses
- IPv4 uses the “**A**” record
- There was another record called **A6**, which didn’t catch on (and now declared historic by RFC 6563)

```
www.ietf.org. 1800 IN A 12.22.58.30
www.ietf.org. 1800 IN AAAA 2001:1890:123a::1:1e
```

[Migrating to IPv6, LOPSA-East 13]

28

IPv6 Reverse DNS

- As in IPv4, PTR records are used for reverse DNS
- Uses “**ip6.arpa**” subtree (IPv4 uses “in-addr.arpa”)
- The LHS of the PTR record (“owner name”) is constructed by the following method:
 - Expand all the zeros in the IPv6 address
 - Reverse all the hex digits
 - Make each hex digit a DNS label
 - Append “ip6.arpa.” to the domain name (note: the older “ip6.int” was formally deprecated in 2005, RFC 4159)

[Migrating to IPv6, LOPSA-East 13]

29

IPv6 reverse DNS example

```
host1.example.com. IN AAAA 2001:db8:3902:7b2::fe04
```

```
2001:db8:3902:7b2::fe04 (orig IPv6 address)
```

```
2001:0db8:3902:07b2:0000:0000:0000:fe04 (expand zeros)
```

```
20010db8390207b2000000000000fe04 (delete colons)
```

```
40ef0000000000002b7020938bd01002 (reverse digits)
```

```
4.0.e.f.0.0.0.0.0.0.0.0.0.0.0.0.2.b.7.0.2.0.9.3.8.b.d.  
0.1.0.0.2 (make DNS labels)
```

```
4.0.e.f.0.0.0.0.0.0.0.0.0.0.0.0.2.b.7.0.2.0.9.3.8.b.d.  
0.1.0.0.2.ip6.arpa. (append ip6.arpa.)
```

```
4.0.e.f.0.0.0.0.0.0.0.0.0.0.0.0.2.b.7.0.2.0.9.3.8.b.d.  
0.1.0.0.2.ip6.arpa. IN PTR host1.example.com.
```

[Migrating to IPv6, LOPSA-East 13]

30


IPv6 DNS references

- RFC 3596: DNS Extensions to Support IP Version 6
- RFC 3363: Representing IPv6 Addresses in DNS
- RFC 3364: Tradeoffs in DNS Support for IPv6
- RFC 4472: Operational Considerations and Issues with IPv6 DNS

[Migrating to IPv6, LOPSA-East 13]

31

IPv4 Header



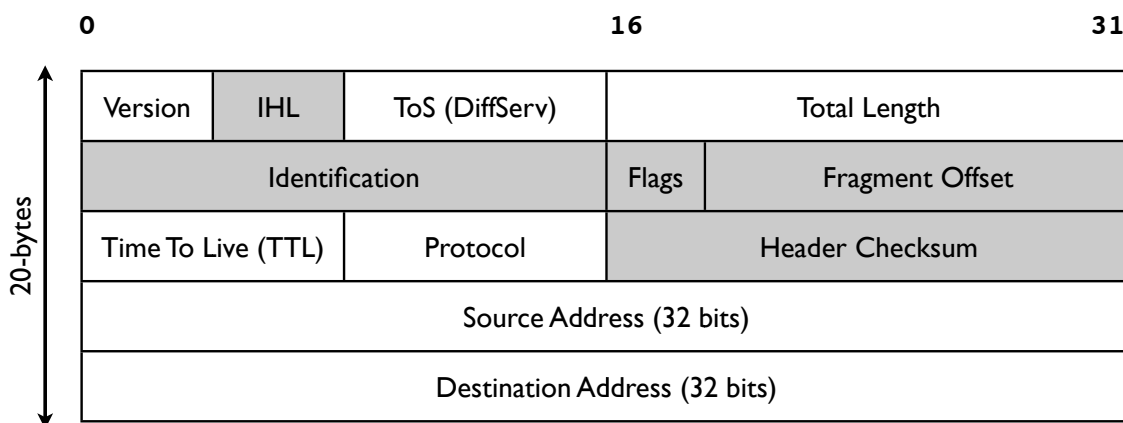


[Followed optionally by Options and Padding]

[Migrating to IPv6, LOPSA-East 13]

32

Extension Headers



[Migrating to IPv6, LOPSA-East 13]

35

Extension Headers

- **Hop-by-Hop** (must be examined by all routers along path: eg. router alert)
- **Destination Options** (can appear after hop-by-hop when RH used, or at end)
- **Routing** (Note: RFC 5095, Dec 2007, deprecated RH type 0)
- **Fragment** (fragments less common in v6 because of path MTU discovery)
- **Authentication (IPsec AH)**
- **Encapsulating Security Payload (IPsec ESP)**
- **Others: MIPv6, HIP, SHIM6, ...**

[See also RFC 6564 - A Uniform Format for IPv6 Extension Headers]

[Migrating to IPv6, LOPSA-East 13]

36

IPv6 Address Types

- **Unicast**
 - **Multicast**
 - **Anycast**
- Note: there is no “**broadcast**” in IPv6

[Migrating to IPv6, LOPSA-East 13]

37

Unicast Address Types

- **Global Unicast Addresses**
 - Static, Stateless Address Autoconfiguration, DHCP assigned
 - Tunneled (6to4, Teredo, ISATAP, ...)
 - Others (CGA, HIP, ...)
- **Link Local Addresses**
- **Unique Local Addresses (ULA)**
- **Loopback (::1)**
- **Unspecified (::)**

Also see RFC 6890: Special Purpose IP address registries
and RFC 6666: IPv6 Discard Prefix

[Migrating to IPv6, LOPSA-East 13]

38

Link Local Addresses

- All IPv6 network interfaces have a Link Local address
- Special address used for communication on local subnet
- Self assigned in the range fe80::/10 (actually the subset fe80::/64)
- Last 64-bits derived from MAC address (EUI-64)
- Could be the same on multiple physical interfaces
- Often written with scope-id to differentiate interface
- fe80::21b:63ff:fe94:9d73%en0



[Migrating to IPv6, LOPSA-East 13]

39

Global IPv6 address form

48-bits	16-bits	64-bits
Global Routing prefix	SubnetID	Interface ID (host part)
001 + 45-bits	SubnetID	Interface ID (host part)

- Prefix 2000::/3 (address starts with bits 001)
- 45-bits: global routing prefix (IANA->RIR->LIR/ISP)
- 16-bits Subnet ID -- can number 65,536 subnets!
- 64-bits Interface ID

[Migrating to IPv6, LOPSA-East 13]

40


Multicast addresses

- Multicast: an efficient one-to-many form of communication
- A special IPv6 address prefix, **ff00::/8**, identifies multicast group addresses
- Hosts that wish to receive multicast traffic “join” the associated multicast group
- Have scopes (link local, site, global etc)
- In IPv4, the group joining and leaving protocol is IGMP
- In IPv6, the protocol is **MLD** (Multicast Listener Discovery)

[Migrating to IPv6, LOPSA-East 13]

41

Multicast addresses



binary 11111111 at the start of the address identifies the address as being a multicast address.

flgs is a set of 4 flags: +-+-+-+-
 |0|R|P|T|
 +-+-+-+-

scop is a 4-bit multicast scope value used to limit the scope of the multicast group. The values are as follows:

- | | | |
|---|--------------------------|-------------------------------|
| 0 | reserved | |
| 1 | Interface-Local scope | |
| 2 | Link-Local scope | |
| 4 | Admin-Local scope | |
| 5 | Site-Local scope | |
| 8 | Organization-Local scope | (excerpted from RFC 4291: |
| E | Global scope | IPv6 Addressing Architecture) |

[Migrating to IPv6, LOPSA-East 13]

42

Some multicast addresses

ff02::1	All nodes on link
ff02::2	All routers on link
ff02::5	All OSPF routers
ff02::6	All OSPF DR (designated routers)
ff02::b	Mobile Agents
ff02::c	SSDP (Simple Service Discovery Protocol)
ff02::d	All PIM (Protocol Independent Multicast) routers
ff02::12	VRRP (Virtual Router Redundancy Protocol)
ff02::16	All MLDv2 capable routers
ff02::fb	mDNSv6 (Multicast DNS v6)
ff02::1:2	All DHCP relay agents and servers
ff02::1:3	LLMNR (Link Local multicast name resolution)
ff02::1:ff00:0000/104	Solicited Node Multicast Address
ff02::2:ff00:0/104	ICMP Node Information Queries (RFC 4620)

[Migrating to IPv6, LOPSA-East 13]

43

Address Configuration

- Servers: usually have statically configured IPv6 addresses (and associated DNS records)
- Client computers: can automatically configure themselves an address (“Stateless Address Autoconfiguration”)
 - typically don’t have associated DNS records
- Managed address allocation can be performed with DHCPv6 (Dynamic Host Configuration Protocol for IPv6)
 - DNS can be pre-populated for DHCPv6 address pools

[Migrating to IPv6, LOPSA-East 13]

44

IPv6 Subnets

- Usually fixed size: 64-bits long (p2p links are often exceptions)
- First 4 fields defined the network portion of the address
- How many hosts can such a subnet accommodate?

$2^{64} = 18,446,744,073,709,551,616$ (or approx 18.5 quintillion)

eg. for a subnet: `2001:db8:ab23:74::/64`

```
start : 2001:db8:ab23:74:0000:0000:0000:0000
end   : 2001:db8:ab23:74:ffff:ffff:ffff:ffff
```

[Migrating to IPv6, LOPSA-East 13]

45

IPv6 Subnets

- IPv6 Addressing Architecture (RFC 4291) requires the host portion of the address (or the “Interface Identifier”) to be 64-bits long
- To accommodate a method that allows hosts to uniquely construct that portion: Modified EUI-64 format
- Generates unique 64-bit identifier from MAC address
- This is used by Stateless Address Autoconfiguration (to be described shortly)

[Migrating to IPv6, LOPSA-East 13]

46

Neighbor Discovery

- RFC 4861
- Analog of ARP in IPv4 but provides many other capabilities
- Stateless Address Autoconfiguration (RFC 4862)
- Managed configuration indication (address configuration policy)
- Router discovery
- Subnet Prefix discovery
- Duplicate address detection (DAD)
- Neighbor unreachability detection (NUD)

[Migrating to IPv6, LOPSA-East 13]

47

Neighbor discovery messages

- Uses 5 ICMPv6 message types:
- Router Solicitation
- Router Advertisement
- Neighbor Solicitation (like ARP Request)
- Neighbor Advertisement (like ARP Response)
- Redirect

[RFC 4443: ICMPv6 Specification]

[Migrating to IPv6, LOPSA-East 13]

48

Solicited node multicast

- Neighbor discovery involves finding other hosts & routers on the local subnet, but recall there is no broadcast in IPv6
- ND uses solicited node multicast addresses, which partition hosts on a subnet into distinct groups, each corresponding to a distinct multicast addresses associated with sets of IPv6 addresses
- For every IPv6 address a host has, it joins the corresponding solicited node multicast address
- Address contains last 24 bits of the IPv6 address
- First 104 bits are the well defined prefix
 - **ff02:0:0:0:0:1:ff00::/104**

[Migrating to IPv6, LOPSA-East 13]

49

Solicited node multicast

- If target address is: 2001:db8:123::ce97:7fce
- Last 24 bits are: 97:7f:ce. Prepend ff02::1:ff00:/104
- So solicited node multicast address is: ff02::1:ff97:7fce
- If Ethernet is the link layer, the corresponding ethernet multicast address: 33-33 + last 32bits of the solicited node address = 33-33-ff-97-7f-ce
- Main takeaway: In IPv6, neighbor discovery involves host sending packet to the solicited node multicast address associated with the target (in contrast to IPv4's ARP, where we send to the broadcast address)


[Migrating to IPv6, LOPSA-East 13]

50


Modified EUI-64

(48-bit MAC Address)


00:26:4a:0b:43:f3



ff:fe



insert bits **ff:fe**
in the middle



02:26:4a:ff:fe:0b:43:f3

(64-bit Modified EUI-64 address)

Set 7th bit
(U/L) to 1
(universal scope)

(details: see RFC 3513, Appendix A)

[Migrating to IPv6, LOPSA-East 13]

Autoconfiguration

- RFC 4862: Stateless Address Autoconfiguration (SLAAC)
- Host listens to Router Advertisements (RA) on local subnet
- Obtains 64-bit subnet prefix from RA (and perhaps other parameters)
- Computes modified EUI-64 from its MAC address and concatenates it to 64-bit subnet prefix to form IPv6 address

Link prefix from RA: 2001:db8:abcd:1234::/64

Host MAC address: 00:1b:63:94:9d:73

EUI-64 address: 021b:63ff:fe94:9d73

Resulting IPv6 address:

2001:db8:abcd:1234:021b:63ff:fe94:9d73

[Migrating to IPv6, LOPSA-East 13]

Router Advertisement

0	8	16	31					
Type = 134	Code = 0			Checksum				
Cur Hop Limit	M	O	H	Pref	P	R	R	Router Lifetime
Reachable Time								
Retransmission Timer								
Options (Source Link Layer, MTU, Prefix Information, ...)								

M = managed config flag: "use stateful DHCPv6"
 O = other config flag: get "other" params via stateless DHCPv6
 Pref = Default Router Preference (Hi, Lo, Med) - RFC 4191
 The most common option is the Prefix Information option

[Migrating to IPv6, LOPSA-East 13]

53

RA: Prefix Info option

0	8	16	31		
Type=3	Length	Prefix Length	L	A	Reserved I
Valid Lifetime					
Preferred Lifetime					
Reserved2					
Prefix					

L = "on link" prefix indicator
A = this prefix can be used for auto-configuration

[Migrating to IPv6, LOPSA-East 13]

54

Router Discovery



```
Router Solicitation Message ->  
Src: fe80::c072:7a5f:c1b5:24d1  
Dst: ff02::2 (all routers multicast)  
ICMPv6 Type 133 (RS)  
Option:  
  Src Link Layer Addr (my MAC addr)
```

```
<- Router Advertisement Message  
Src: router's link local addr  
Dst: ff02::1 (all nodes or solicitor)  
ICMPv6 Type 134 (RA)  
Flags (M=0, O=0, pref=0)  
Router Lifetime: 1800  
Reachable time: 0  
Retrans time: 0  
Options:  
  Src Link Layer Addr (my Mac)  
  MTU: 1500  
  Prefix Info  
    prefix: 2001:db8:ab:cd::/64  
    valid life: 2592000  
    preferred lifetime: 604800
```

(Routers also periodically send out unsolicited router advertisements.)

[Migrating to IPv6, LOPSA-East 13]

55

Neighbor Discovery



```
Neighbor Solicitation Message ->  
Src: A's IPv6 address  
Dst: Solicited-node multicast of B  
ICMPv6 Type 135 (NS)  
Target: B's IPv6 address  
Options:  
  Src Link Layer Addr (A's MAC addr)
```

(Summary: A is asking: what is the link layer address associated with B's IPv6 address?)

```
<- Neighbor Advertisement Message  
Src: B's IPv6 address  
Dst: A's IPv6 address  
ICMPv6 Type 135 (NA)  
Target: B's IPv6 address  
Options:  
  Src Link Layer Addr (B's MAC addr)
```

[Migrating to IPv6, LOPSA-East 13]

56

SLAAC & Privacy?

- SLAAC exposes MAC address of a host to the world
- In IPv4, MAC was exposed to local subnet only
- Does this have privacy implications?
- Remote sites may be able to track & correlate your network activities by examining a constant portion of your address
- How serious are these compared to other highly privacy invasive mechanisms already in use at higher layers?
 - think of things like web cookies that track/expose user identity, often across sites

[Migrating to IPv6, LOPSA-East 13]

57

Temporary addresses

- RFC 4941: Privacy extensions for Stateless Address Auto-configuration
- Pool of “Temporary addresses” or “Privacy addresses”
- Derived from MAC initially, ala SLAAC, but then passed through a 1-way hash algorithm
- Designed to change over time; duration configurable or based on policy; hours, days, on reboot, or different addresses for different applications or endpoints
- Cons: complicate network debugging, security/audit implications (see proposal for “*stable privacy addresses*”)

[Migrating to IPv6, LOPSA-East 13]

58

Temporary addresses

- On by default in Windows (since XP), Mac OS X 10.7, Open Suse 12.1, Ubuntu Linux 12.04, ..
- Also on in Apple iOS devices (iPhone, iPad etc)
- Android 4.0 uses and prefers privacy addresses (on wifi)
- Off by default in others, but easily turned on via configuration knobs in the operating system (eg. sysctl on Linux and *BSD)

[Migrating to IPv6, LOPSA-East 13]

59

DHCPv6

- Stateless DHCPv6 (RFC 3736)
 - No IPv6 address assignment (“stateless”); assumed that SLAAC or other method will be used for address configuration
 - Other network configuration parameters are provided, eg. DNS servers, NTP servers etc
- Stateful DHCPv6 (RFC 3315)
 - Managed address allocation analogous to DHCP in IPv4
 - Easy to populate DNS & reverse DNS (compared to autoconfig)

[Migrating to IPv6, LOPSA-East 13]

60

Stateful DHCPv6

- Stateful DHCPv6 (RFC 3315) - more details
- Conceptually similar to IPv4 DHCP
- Uses RA's **M** (managed configuration) flag
- Requires DHCPv6 server, which assigns IPv6 leases to clients
- And provides other configuration info (DNS, NTP, ... etc)

[Migrating to IPv6, LOPSA-East 13]

61

Differences with IPv4 DHCP

- Uses UDP ports 546 (server) and 547 (client)
- Clients use autoconfigured link-local addresses as source
- Clients send messages to multicast group address ff02::1:2 (“all dhcp servers and relay agents group”); IPv4 uses broadcast
- **Does not assign default gateway** - use Router Advertisement
- DHCP servers can send “reconfigure” messages to clients
- Rapid Commit option (reduce exchange from 4 to 2 messages)
- DUID (DHCP Unique IDentifiers)
- Provision for temporary and non-temporary addresses

[Migrating to IPv6, LOPSA-East 13]

62

IPv4 v IPv6 DHCP messages

DHCP v4 (rfc 2131)	DHCP v6 (rfc 3315)
C -> broadcast: DISCOVER	C -> multicast: SOLICIT
S -> C: OFFER	S -> C: ADVERTISE
C -> S: REQUEST	C -> S: REQUEST
S -> C: ACK	S -> C: REPLY

[Migrating to IPv6, LOPSA-East 13]

63

IPv4 v IPv6 DHCP messages

with rapid commit option

DHCP v4 (rfc 2131)	DHCP v6 (rfc 3315)
C -> broadcast: DISCOVER	C -> multicast: SOLICIT
S -> C: OFFER	S -> C: REPLY
C -> S: REQUEST	
S -> C: ACK	

[Migrating to IPv6, LOPSA-East 13]

64

DHCPv6 DUID

- Clients no longer use hardware address to identify themselves
 - Issues: multiple interfaces, mobility, virtual interfaces & VMs etc
 - DUID: DHCP Unique IDentifier - use long lived unique id instead
 - Used by both clients and servers
 - Number of methods to initialize a DUID (based on link layer address, time, enterprise numbers etc): DUID-LLT/ET/LT

[Migrating to IPv6, LOPSA-East 13]

65

DHCPv6 DUID

- DUID construction methods:
 - DUID-LLT: constructed from link-layer address of one of the system interfaces (ie. from hardware address), hardware type, and timestamp
 - DUID-EN: using enterprise number of device manufacturer and an ID number
 - DUID-LL: constructed from link-layer address and hardware type
- Challenges with DUIDs:
 - when we want to obtain MACs; correlating IPv4/IPv6 addresses; persistent storage on some devices, etc

[Migrating to IPv6, LOPSA-East 13]

66

DHCPv6 Leases & Lifetimes

- Leases (bindings) as in IPv4
- Lifetimes: Offered addresses have preferred and Valid lifetimes as in stateless autoconfiguration

[Migrating to IPv6, LOPSA-East 13]

67

Stateless DHCPv6

- Triggered by “O (other config) flag” in RA messages
- INFORMATION_REQUEST message:
 - To request other configuration parameters
 - C -> multicast: INFORMATION_REQUEST
 - S -> C: REPLY
- Conceptually similar to the DHCPINFORM message in IPv4

[Migrating to IPv6, LOPSA-East 13]

68

DHCPv6 options

- Used by both stateful and stateless DHCPv6
- Some common options for configuration information:
 - DNS Recursive Nameservers
 - DNS Search List
 - NTP servers
 - SIP servers
 - Prefix Delegation (RFC 3633) - eg. delegating prefix to a home router
 - and many more ...

[Migrating to IPv6, LOPSA-East 13]

69


DHCPv6 Other

- Other messages: RENEW, REBIND, CONFIRM, RELEASE, DECLINE, RECONFIGURE
- Relay Agents supported as in IPv4 (RELAY_FORW, RELAY_REPL)
- ServerFailover protocol
 - So far missing in v6, but development work in progress.
 - Less important for IPv6 (use multiple independent servers offering disjoint address pools), but there are some uses cases.
- Prefix delegation
- Client Link Layer Address Option (coming)
 - <http://tools.ietf.org/html/draft-ietf-dhc-dhcpv6-client-link-layer-addr-opt-05>

[Migrating to IPv6, LOPSA-East 13]

70

DHCPv6 with Relay Agent

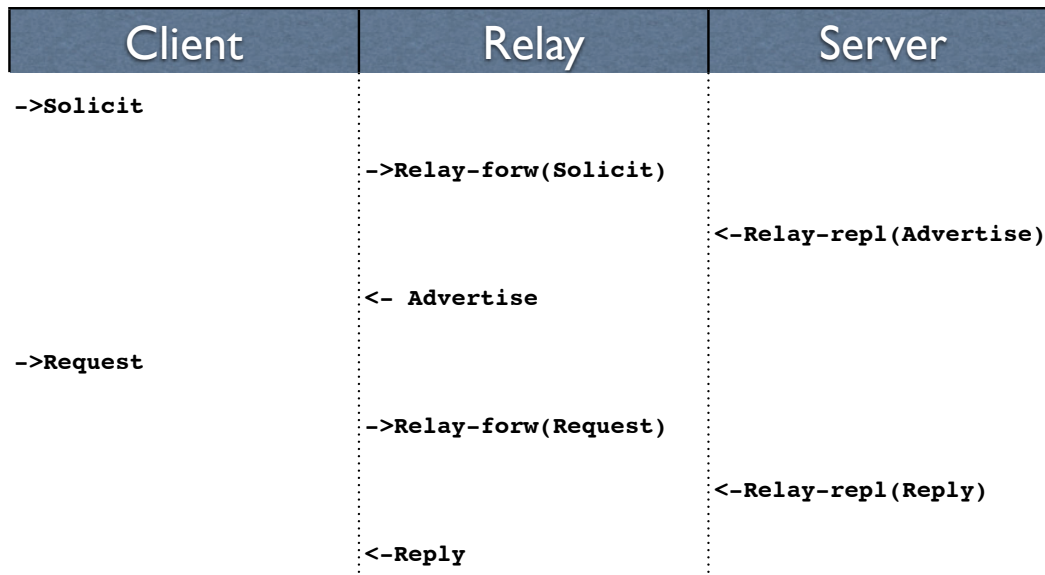

[Migrating to IPv6, LOPSA-East 13]

71

Other config possibilities

- New Router Advertisement options
 - RFC 6106: RA options for DNS configuration
 - Allows transmission of DNS server and related info via RA (obviating need to deliver this via other means, eg. stateless DHCPv6)
 - Very few implementations to date though ..
- In the opposing camp, there is (was?) also a proposal to extend DHCPv6 to provide default gateway options, obviating the need to use Router Advertisements
 - <http://tools.ietf.org/html/draft-droms-dhc-dhcpv6-default-router-00>
 - <http://tools.ietf.org/html/draft-ietf-mif-dhcpv6-route-option-05>

[Migrating to IPv6, LOPSA-East 13]

72


Unique Local Address (ULA)

- RFC 4193, Prefix `fc00::/7`
- Replacement for IPv4 Private Addresses (RFC 1918)
- Note: the older *site local prefix* (`fec0::/10`) was deprecated
- Intended for local use within a site or group of sites
- Globally unique, but not routable on the global Internet
- Addresses some operational issues seen with IPv4 and RFC 1918 addresses

[Migrating to IPv6, LOPSA-East 13]

73

Unique Local Address (ULA)



Where:

Prefix	FC00::/7 prefix to identify Local IPv6 unicast addresses.
L	Set to 1 if the prefix is locally assigned. Set to 0 may be defined in the future. See Section 3.2 for additional information.
Global ID	40-bit global identifier used to create a globally unique prefix.
Subnet ID	16-bit Subnet ID is an identifier of a subnet within the site.

[RFC 4193 excerpt]

[Migrating to IPv6, LOPSA-East 13]

74

IPv6 addresses on a Mac

```
$ ifconfig -a

lo0: flags=8049<UP,LOOPBACK,RUNNING,MULTICAST> mtu 16384
    options=3<RXCSUM,TXCSUM>
    inet6 fe80::1%lo0 prefixlen 64 scopeid 0x1
    inet 127.0.0.1 netmask 0xff000000
    inet6 ::1 prefixlen 128
en1: flags=8863<UP,BROADCAST,SMART,RUNNING,SIMPLEX,MULTICAST> mtu 1500
    ether e4:ce:8f:07:b6:13
    inet6 fe80::e6ce:8fff:fe07:b613%en1 prefixlen 64 scopeid 0x5
    inet6 2607:f470:6:3:e6ce:8fff:fe07:b613 prefixlen 64 autoconf
    inet6 2607:f470:6:3:3947:98a5:68f6:2ef1 prefixlen 64 autoconf temporary
    inet 165.123.70.49 netmask 0xfffff00 broadcast 165.123.70.255
    media: autoselect
    status: active
```

[Migrating to IPv6, LOPSA-East 13]

75

IPv6 addresses on Windows

```
C:>ipconfig

Windows IP Configuration

[...]

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix . . :
    IPv6 Address. . . . . : 2607:f470:2f:1:2dde:6914:cafe:15fe
    Temporary IPv6 Address. . . . . : 2607:f470:2f:1:806c:86ee:b372:47b2
    Link-local IPv6 Address . . . . . : fe80::2dde:6914:cafe:15fe%10
    IPv4 Address. . . . . : 128.91.196.91
    Subnet Mask . . . . . : 255.255.254.0
    Default Gateway . . . . . : fe80::216:9cff:fe6f:5dc0%10
                                128.91.196.1
```

[Migrating to IPv6, LOPSA-East 13]

76

IPv6 addresses on Linux

```
$ ifconfig

lo          Link encap:Local Loopback
            inet addr:127.0.0.1  Mask:255.0.0.0
            inet6 addr: ::1/128 Scope:Host
            UP LOOPBACK RUNNING  MTU:16436  Metric:1
            RX packets:544285 errors:0 dropped:0 overruns:0 frame:0
            TX packets:544285 errors:0 dropped:0 overruns:0 carrier:0
            collisions:0 txqueuelen:0
            RX bytes:355551886 (339.0 MiB)  TX bytes:355551886 (339.0 MiB)

eth0       Link encap:Ethernet  HWaddr 00:14:4F:01:31:F8
            inet addr:128.91.XXX.68  Bcast:128.91.255.255  Mask:255.255.254.0
            inet6 addr: 2607:f470:2a:1::a:2/64 Scope:Global
            inet6 addr: 2607:f470:2a:1::a:1/64 Scope:Global
            inet6 addr: 2607:f470:2a:1:214:4fff:fe01:34f7/64 Scope:Global
            inet6 addr: fe80::214:4fff:fe01:34f7/64 Scope:Link
            UP BROADCAST RUNNING MULTICAST  MTU:1500  Metric:1
            RX packets:9228907 errors:0 dropped:0 overruns:0 frame:0
            TX packets:3889095 errors:0 dropped:0 overruns:0 carrier:0
            collisions:0 txqueuelen:1000
            RX bytes:1686780678 (1.5 GiB)  TX bytes:1997866418 (1.8 GiB)
```

[Migrating to IPv6, LOPSA-East 13]

77

Linux RA example

Example of RA info seen on a Linux machine. This host has a static address, and 2 autoconfigured addresses, one deprecated because its preferred lifetime has expired.

```
$ /sbin/ip -6 addr show dev eth0

eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qlen 1000
    inet6 2607:f470:1001::1:12/64 scope global
        valid_lft forever preferred_lft forever
    inet6 2607:f470:1001:0:214:4fff:fee6:b650/64 scope global
        dynamic
        valid_lft 2591957sec preferred_lft 604757sec
    inet6 2001:468:1802:101:214:4fff:fee6:b650/64 scope global
        deprecated dynamic
        valid_lft 6308sec preferred_lft -892sec
    inet6 fe80::214:4fff:fee6:b650/64 scope link
        valid_lft forever preferred_lft forever
```

[Migrating to IPv6, LOPSA-East 13]

78

Common IPv6 assignments

< /32	RIRs and large ISPs
/32	Typically to LIRs and ISPs. Allows 65,536 /48 assignments, or 4 billion /64 subnets
/48	Most enterprises and endsites. Allows deployment of 65,536 /64 subnets
/56	Small sites; Residential service. Allows deployment of 256 /64 subnets
/64	Residential service. Allows one /64 subnet

- See RFC 6177 for latest thinking on endsite assignments


[Migrating to IPv6, LOPSA-East 13]

79



IPv6 ADDRESS SPACE

How much has been allocated to the RIRs?

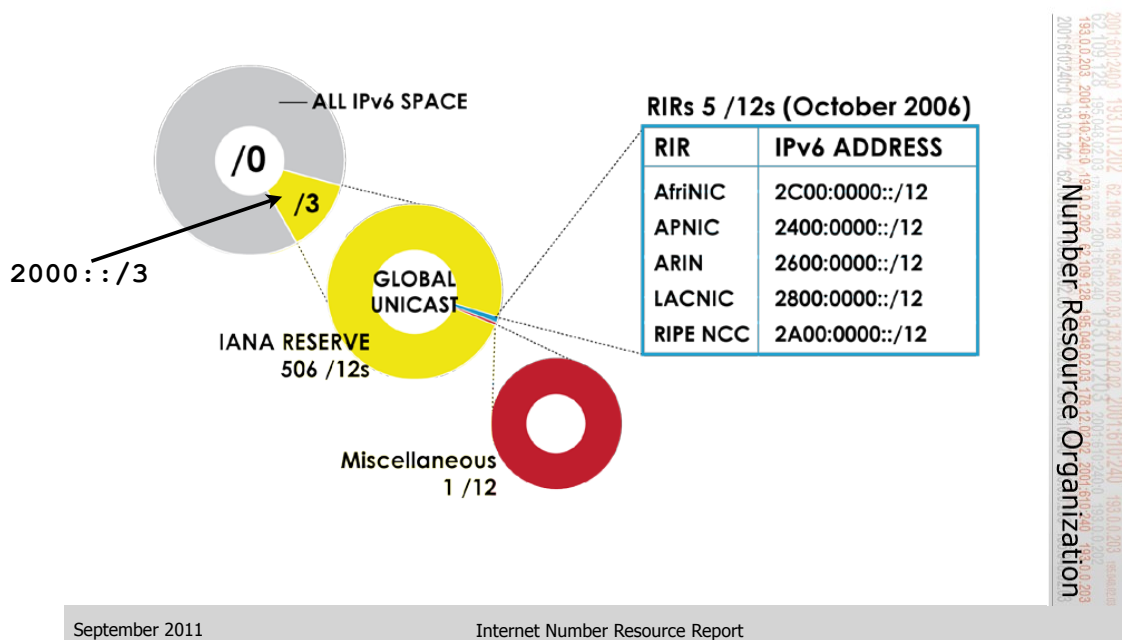

[Migrating to IPv6, LOPSA-East 13]

80

PA vs PI address space

- Provider Assigned (PA)
 - Usually assigned by your ISP, and suballocated by the ISP from a larger block of addresses the ISP has
 - ISP aggregates the announcement upstream
 - Customer usually obtains one PA block from each ISP
- Provider Independent (PI)
 - Sometimes called “Portable” address space
 - Not aggregated by upstream ISPs/Peers and appears as a distinct prefix in the global Internet routing table (**scalability issues!**)
 - Needed for multihoming (pending a better scalable solution)

[Migrating to IPv6, LOPSA-East 13]

81

Provider Aggregation eg.

A real example ...


2001:468::/32	Internet2: PI block
2001:468:1800::/40	MAGPI GigaPop: PA block
2001:468:1802::/48	University of Pennsylvania: PA block

Internet2 suballocates the /40 block from its own PI block to MAGPI (a regional ISP), and MAGPI suballocates a /48 from that to its downstream connector UPenn. Internet2 only sends the aggregate /32 announcement to its peers (other large ISPs and organizations), and only that /32 prefix is seen in the global Internet2 routing table.

[Migrating to IPv6, LOPSA-East 13]

82

Provider Aggregation eg.

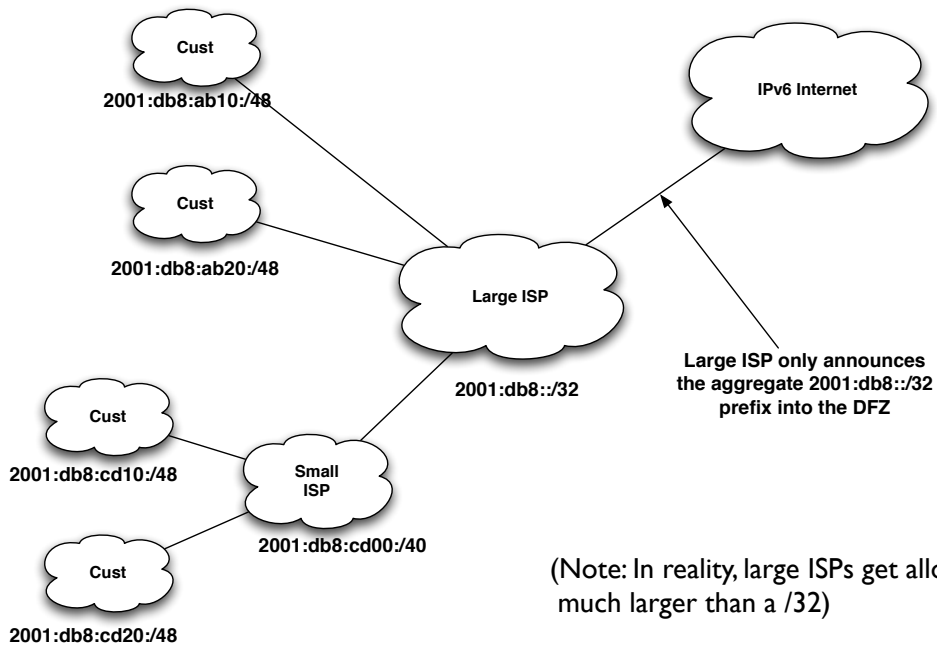

(Note: In reality, large ISPs get allocations much larger than a /32)

[Migrating to IPv6, LOPSA-East 13]

83

Multihoming

- Not fully solved; an area of active research & protocol design
- Initial model: everything is provider assigned and aggregatable
- Now **PI** (Provider Independent) address space common
- Future possibilities:
 - **SHIM6** - RFC 5533, 5534, 5535
 - **LISP** - Locator/Identifier Separation Protocol - see IETF wg
 - IRTF routing research group
 - **RFC 6115**: Recommendation for a Routing Architecture
 - **ILNP**: Identifier-Locator Network Protocol (RFC 6740-6748)

[Migrating to IPv6, LOPSA-East 13]

84

IPv6 support in network service providers

[Migrating to IPv6, LOPSA-East 13]

85

ISPs offering IPv6

- Some: NTT/Verio, Global Crossing, Level 3, Cogent, Cable & Wireless, Reliance, Tata Communications, TeliaSonera, Hurricane Electric, Comcast Business, ... (growing list)
- <http://www.sixxs.net/faq/connectivity/?faq=ipv6transit>
- http://en.wikipedia.org/wiki/Comparison_of_IPv6_support_by_major_transit_providers
- Mixture of native and tunneled IPv6 service
- If you're a US edu, you might be able get IPv6 connectivity via the Internet2 R&E network
 - Equivalent opportunities with other national or continental RENs (JANET, SURFNet, GEANT, APAN etc)

[Migrating to IPv6, LOPSA-East 13]

86

Mobile Carriers

- An increasing number of mobile carriers now support IPv6 (e.g. on their 4G/LTE networks)
 - Verizon LTE, AT&T, T-Mobile
 - May need specific type of phones/hardware to take advantage of this though

[Migrating to IPv6, LOPSA-East 13]

87

T-Mobile deploys IPv6

January 2012

<http://www.androidpolice.com/2012/01/29/t-mobile-usa-testing-ipv6-on-select-devices-here-is-what-it-all-means-and-yes-no-more-nat/>

"T-Mobile USA is running an open beta for enabling IPv6 address assignment to some devices on its network in place of the traditional IPv4 addresses."

April 2012

<http://www.extremetech.com/mobile/127213-ipv6-now-deployed-across-entire-t-mobile-us-network>

"T-Mobile has completed the deployment of IPv6 services across its entire network. This isn't the first IPv6 network, but it is the largest wireless IPv6 deployment in the world."

<https://sites.google.com/site/tmoipv6/lg-mytouch>

[Migrating to IPv6, LOPSA-East 13]

88

Residential Service

- Not as encouraging, but ...
- Comcast is leading the charge
 - <http://www.comcast6.net/>
 - 50% of broadband footprint enabled; 2.5% customers are using IPv6 now; commercial metro ethernet IPv6 enabled too
- Who else?
 - AT&T some; Time Warner has limited trials
 - Verizon FIOS has no announced plans yet

[Migrating to IPv6, LOPSA-East 13]

89

IPv6 Information Center

<http://www.comcast6.net/>

Your IP address is 2607:f470:2:1:c89c:d8f2:4f7a:5e76

Comcast's IPv6 Deployment Has Started

This site has the latest information about Comcast's IPv6-related work, and is regularly updated as our IPv6 deployment continues.

IPv6 Trial News and Information:

Xfinity, XfinityTV, and Customer Support Forum Web Sites Go Native Dual Stack Tuesday, April 10, 2012

Our Xfinity and XfinityTV web portals, as well as our customer support forum have begun the move to IPv6 by enabling support for Native Dual Stack. The first part to move was our customer support forum, at forums.comcast.com, which went live in December 2011. This was in partnership with our support forum vendor, [Lithium](#). The newest part today moves two of our major portal sites to IPv6, including [Xfinity](#) and [XfinityTV](#). This critical move was made possible via close cooperation with [Akamai](#), our CDN vendor. Over time, we will introduce support for native IPv6 for all of our other key websites.

Also see http://www.cio.com/article/704136/Comcast_is_First_U.S._ISP_to_Offer_IPv6_to_Home_Gateway_Users

[Migrating to IPv6, LOPSA-East 13]

90

Time Warner Cable IPv6 trials

Date: September 27, 2011 8:35:42 AM CDT

To: "nanog@nanog.org" <nanog@nanog.org>

Subject: Volunteers needed for TWC IPv6 trial

Time Warner Cable is expanding our residential IPv6 trials in several markets, and we need more people. If you're a Time Warner Cable High Speed Internet subscriber, and are interested in participating in our IPv6 trials, please let us know! We have a short form at

http://www.timewarnercable.com/Corporate/support/IPv6_volunteerform.html

that will help us find the right mix of people, equipment, and locations, to get the most out of our trials.

Thanks in advance for participating!

Time Warner Cable

Also see: http://www.macobserver.com/tmo/article/time_warner_cable_talks_about_ipv6_launch/

[Migrating to IPv6, LOPSA-East 13]

91

Content Delivery Networks

- **LimeLight Networks** supports IPv6
 - claims to be first IPv6 CDN
- **Akamai** announced production IPv6 support in April 2012
 - <http://www.akamai.com/ipv6>
- **Cloudflare** and **Edgecast** too
- See ISOC's deploy360 page for more:
 - <http://www.internetsociety.org/deploy360/resources/ipv6-and-content-delivery-networks-cdns/>

[Migrating to IPv6, LOPSA-East 13]

92

Other Cloud

- Amazon Web Services
 - <http://aws.amazon.com/about-aws/whats-new/2011/05/24/elb-ipv6-zoneapex-securitygroups/>
 - No internal infra support, but dualstack on outside facing possible
- Other Cloud providers: Cloudflare, Softlayer, Arpnetworks, Linode

[Migrating to IPv6, LOPSA-East 13]

93

IPv6 Support in popular Operating Systems

[Migrating to IPv6, LOPSA-East 13]

94

Operating System Support

- Most modern operating system support IPv6 out of the box
- Microsoft Windows, Apple Mac OS X, Linux, *BSD, Solaris, Tru64 UNIX, IBM AIX, etc
- Mobile OSes like iOS, Android do also
- They generally use autoconfiguration or DHCPv6 to configure IPv6 addresses
- For servers, it's advisable to configure static addresses

[Migrating to IPv6, LOPSA-East 13]

95

Windows

- Vista, Windows 7 onwards: IPv6 is by default ON
- Windows XP: turn it on:
 - netsh interface ipv6 install

[Migrating to IPv6, LOPSA-East 13]

96

Mac OS X

- On by default.
- In Mac OS X Lion (released July 2011), both Stateless Address Autoconfiguration and DHCPv6 are supported. In earlier versions only the former was supported.
- Details can be seen in the “Network Preferences” pane of the “Preferences” application, where it is also possible to configure a static IPv6 address and gateway.

[Migrating to IPv6, LOPSA-East 13]

97

Linux

- Most modern versions have IPv6 turned on by default
- Actual details vary, from distribution to to distribution
- RedHat/Fedora/CentOS etc:
 - File: /etc/sysconfig/network:
 - NETWORKING_IPV6=yes
- Many more details in <http://www.bieringer.de/linux/IPv6/>

[Migrating to IPv6, LOPSA-East 13]

98

Linux: static address

(This example is for Redhat/CentOS/Fedora etc ...)

/etc/sysconfig/network:

```
NETWORKING_IPV6=yes
IPV6_AUTOCONF=no
IPV6_DEFAULTGW=fe80::4
IPV6_DEFAULTDEV=eth0
```

/etc/sysconfig/network-scripts/ifcfg-eth0:

```
IPV6INIT=yes
IPV6ADDR=2001:db8:ab:cd::4/64
```

Manually adding, deleting IPv6 addresses on an interface:

```
ifconfig eth0 add inet6 2001:db8:ab:cd::4/64
ifconfig eth0 del inet6 2001:db8:ab:cd::4/64
```

[Migrating to IPv6, LOPSA-East 13]

99

FreeBSD

Again, IPv6 is on by default, and uses autoconfig.

Static IPv6 address configuration example:

/etc/rc.conf:

```
ipv6_enable="yes"
ipv6_network_interfaces="auto"
ipv6_ifconfig_fxp0="2001:db8:ab:cd::4/64"
```

For more details, see:

http://www.freebsd.org/doc/en_US.ISO8859-1/books/handbook/network-ipv6.html

[Migrating to IPv6, LOPSA-East 13]

100

Solaris

Again, IPv6 is on by default.

Interface address configuration file:
/etc/hostname6.<interfacename> eg. /etc/hostname6.e1000g0

Some possible contents of this file:

```
<empty file>           # use stateless autoconfiguration

token ::2:2/64         # Defines the 64-bit IID; network
                       # prefix is derived from RA

addif inet6 2001:db8:ab::1 up    # full static address
```

[Migrating to IPv6, LOPSA-East 13]

101

Apple iOS

- Apple's iOS (iPhone, iPad, etc) version 4 onwards supports IPv6 (on Wi-fi interface)
- Supports both stateless address autoconfiguration (and with v.4.3.1 onwards, temporary addresses), and DHCPv6.
- Configured automatically; no configuration knobs are provided in the UI.

[Migrating to IPv6, LOPSA-East 13]

102

Android

- Google's Android mobile operating system supports IPv6

[Migrating to IPv6, LOPSA-East 13]

103

IPv6 Support in Application Software

[Migrating to IPv6, LOPSA-East 13]

104

Application Services

- Recall: IPv6 is not backwards compatible with IPv4
- Applications need to be modified to support IPv6
- Many open source & commercial applications already do!
- Don't forget to consider home grown, and locally developed applications also!

[Migrating to IPv6, LOPSA-East 13]

105

IPv6 ready applications

- Webservers: Apache, IIS
- E-mail: Sendmail, Postfix, UW IMAP, Cyrus, MS Exchange, Exim, Qmail, Dovecot, Courier
- DNS: BIND, NSD, PowerDNS, Microsoft DNS
- LDAP: OpenLDAP, Active Directory
- Kerberos: MIT, Heimdal, Active Directory
- More comprehensive lists:
 - <http://www.ipv6-to-standard.org/>
 - http://www.deepspace6.net/docs/ipv6_status_page_apps.html

[Migrating to IPv6, LOPSA-East 13]

106

IPv6 client software

- Browsers: Firefox, Internet Explorer, Safari, Chrome, Opera
- E-mail: Apple Mail, Thunderbird, MS Outlook
- [others to be added ...]

[Migrating to IPv6, LOPSA-East 13]

107

A few configuration examples ...

Not exhaustive by any means. I'm just showing quick configuration examples of some popular UNIX based software applications.

[Migrating to IPv6, LOPSA-East 13]

108


DNS: ISC BIND

named.conf

```
# tell nameserver to listen on IPv6 socket
options {
    listen-on-v6 { any; };
    listen-on-v6 { ::1; 2001:db8:ab:cd::3; };
    ...
};

# example of IPv6 prefixes in an ACL
acl trusted {
    127.0.0.0/8;
    192.168.2.0/24;
    ::1/128;
    2001:db8:ab::/48;
};
```

only use one
listen-on statement



[Migrating to IPv6, LOPSA-East 13]

109

DNS: ISC BIND

named.conf

```
# an IPv6 reverse zone for 2001:db8:abcd::/48
zone "d.c.b.a.8.b.d.0.1.0.0.2.ip6.arpa" {
    type master;
    file "abcd-reverse.zone";
};
```

[Migrating to IPv6, LOPSA-East 13]

110

DHCP: ISC DHCP

```
option dhcp6.name-servers 2001:db8:1:1::200;
option dhcp6.domain-search "example.com";

# dynamic pool of addresses
subnet6 2001:db8:1:1::0/64 {
    range6 2001:db8:1:1::10 2001:db8:1:1::200;
}

# fixed address assignment to specific client
host ws1 {
    host-identifier option dhcp6.client-id 00:01:00:06:4d:
57:4b:d1:00:03:3a:d5:c7:04;
    fixed-address6 2001:db8:1:1::701;
}

# Dynamic address, and specifically assigned DNS server
host ws2 {
    host-identifier option dhcp6.client-id 00:01:00:01:14:ed:
66:c1:08:00:27:94:08:40;
    option dhcp6.name-servers 2001:db8:1:1::201;
}
```

Note: DUID,
not MAC addr



[Migrating to IPv6, LOPSA-East 13]

111

Apache Web server

httpd.conf

```
Listen [::]:80
Listen [::]:443
Listen [2001:db8:ab:cd::2]:80

# A dual stack virtualhost stanza example
<VirtualHost 192.68.24.2:80 [2001:db8:ab:cd::2]:80>
    ...
    ...
</VirtualHost>
```

[Migrating to IPv6, LOPSA-East 13]

112

Web browsers

- Most IPv6 capable web browsers today (eg. Firefox, IE, Chrome, Safari, Opera, etc) are by default enabled for IPv6 operation. No special configuration is needed.
- (Note: in older versions of Firefox, IPv6 was disabled by default, and you needed to go to “about:config” and change the value of “network.dns.disableIPv6” from “true” to “false”)

[Migrating to IPv6, LOPSA-East 13]

113

SMTP: Sendmail

sendmail.mc:

```
DAEMON_OPTIONS(`Port=smtp, Addr::, Name=MTA-v6,  
Family=inet6')
```

```
// Then regenerate sendmail.cf and restart sendmail
```

[Migrating to IPv6, LOPSA-East 13]

114

SMTP: Postfix

Postfix 2.2 onwards supports IPv6. As of this writing, by default it uses IPv4 only; IPv6 has to be turned on explicitly.

main.cf:

```
# Enable IPv4 and IPv6 if supported
# choices are: ipv4, ipv6, all
inet_protocols = all
```

```
mynetworks = 192.168.0.0/16, [2001:db8:abcd::]/48
```

Many more details can be found at:
http://www.postfix.org/IPV6_README.html

[Migrating to IPv6, LOPSA-East 13]

115

IMAP: UW IMAP

University of Washington's IMAP server software supports IPv6, but if you compile from source, you may need to specify IP=6 in your "make" command.

Check your Linux/BSD/UNIX distribution though. They have already built UW imapd with IPv6 support. This is true in recent versions of Fedora Linux for example.

[Migrating to IPv6, LOPSA-East 13]

116

IMAP: Cyrus

IPv6 support can be enabled by service in cyrus.conf:

```
proto = tcp # tcp, udp, tcp4, udp4, tcp6, udp6
```

[Migrating to IPv6, LOPSA-East 13]

117

LDAP: OpenLDAP

OpenLDAP version 2.x onwards supports IPv6.

slapd supports a "-6" command line option for IPv6 only operation.

[Migrating to IPv6, LOPSA-East 13]

118

Kerberos

MIT Kerberos

MIT Kerberos has had support for IPv6 in the KDC for many releases.

More complete support is in the latest release (v.1.9), where the Kerberos administration server (kadmind) and propagation server (kpropd) also support IPv6, and IPv6 addresses can be directly specified in the configuration files if needed.

For details, see <http://k5wiki.kerberos.org/wiki/IPv6>

Heimdal

Heimdal also supports IPv6.

[Migrating to IPv6, LOPSA-East 13]

119

tcp wrappers

tcp wrappers is a popular access control facility for internet services on UNIX platforms.

Use the syntax [IPv6prefix]/prefixlength in the tcp wrappers configuration files **/etc/hosts.allow** and **/etc/hosts.deny**. IPv4 and IPv6 prefixes can be mixed on the same lines, eg.

```
sshd: 192.168.0.0/255.255.0.0 [2001:db8:ab::]/48
imapd: 192.168.4.0/255.255.255.0 [2001:db8:ab:cd::]/64
```

[Migrating to IPv6, LOPSA-East 13]

120

IPv6 Tunneling

[Migrating to IPv6, LOPSA-East 13]

121

Automatic Tunneling

- Even without IPv6 deployed in your network, computers may be using IPv6
- Via automatic tunneling mechanisms. Two popular ones are **6to4** and **Teredo**
- These work by **encapsulating** IPv6 packets inside IPv4 packets and sending them to a relay router that is connected to both the IPv4 and IPv6 Internet
- **Tunnels sometimes cause connectivity and performance problems. Native IPv6 deployment usually fixes all of them**

[Migrating to IPv6, LOPSA-East 13]

122

6to4

- A transition method for IPv6 capable hosts or networks that don't have native IPv6 network connectivity to use tunneling to communicate with other IPv6 islands and/or the IPv6 Internet
- Does not involve explicit setup of the tunnels.
- 6to4 hosts and networks are numbered in the **2002::/16** prefix
- **6to4 routers** sit at the edge of an IPv6 site and the IPv4 Internet
- The most common deployment model of 6to4 involves using 6to4 anycast addresses to reach **6to4 relay routers**
 - **192.88.99.1** and **2002:c058:6301::**

[Migrating to IPv6, LOPSA-East 13]

123

6to4

- Site constructs a /48 IPv6 prefix by concatenating 6to4 router's IPv4 address to 2002::/16, and tunnels IPv6 packets from the 6to4 router to a 6to4 relay router that is connected to both the IPv4 and IPv6 Internet.
- A site could be a single computer, in which case it is itself the 6to4 router

References:

RFC 3056: Connection of IPv6 domains via IPv4 clouds


RFC 3068: An anycast prefix for 6to4 relay routers

RFC 6343: Advisory Guidelines for 6to4 deployment

[Migrating to IPv6, LOPSA-East 13]

124

6to4 Diagram

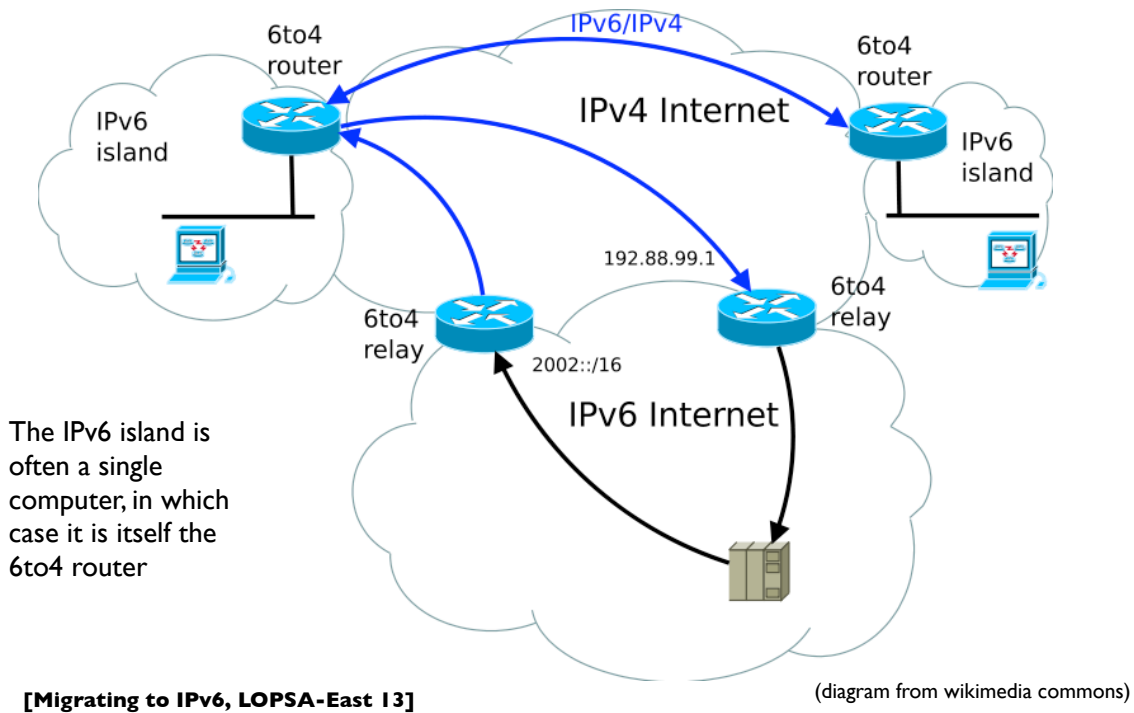

125

6to4 Addressing example

Example of a single computer acting as a 6to4 router.

IPv4 address: **203.0.113.5** (in hex: **cb007105**)

6to4 network prefix is: **2002:cb00:7105::/48** (2002::/16 + 32-bit IPv4)

Configure my IPv6 address as (subnet 1, interface-id 1)

My IPv6 address: **2002:cb00:7105:1::1**

6to4 relay anycast IPv4 address: **192.88.99.1**

6to4 relay anycast IPv6 address: **2002:c058:6301::**

To send a packet to 2001:db8:ab:cd::3, the computer encapsulates the IPv6 packet inside an IPv4 packet that is sent to the 6to4 relay IPv4 address:

IPv4 src = 203.0.113.5

IPv4 dst = 192.88.99.1

IPv6 src = 2002:cb00:7104:1::1

IPv6 dst = 2001:db8:ab:cd::3

The relay router decapsulates the IPv6 packet and forwards it natively to the IPv6 destination.

Return IPv6 traffic is directly natively to a (probably different) 6to4 relay router, which derives the destination's IPv4 address from the 6to4 address, and encapsulates the IPv6 packet in an IPv4 header directed to the 6to4 host's IPv4 address.

[Migrating to IPv6, LOPSA-East 13]

126

6to4 Addressing example

6to4 host to relay	IPv4 Header	IPv6 Header	IPv6 Payload
	Src=203.0.113.5 Dst=192.88.99.1 Proto=41 (IPv6 encap)	Src=2002:cb00:7105:1::1 Dst=2001:db8:ab:cd::3	TCP, UDP, etc
relay to v6 host	IPv6 Header	IPv6 Payload	
	Src=2002:???? Dst=192.88.99.1	TCP, UDP, etc	
v6 host to relay	IPv6 Header	IPv6 Payload	
	Src=2001:db8:ab:cd::3 Dst=2002:cb00:7105:1::1	TCP, UDP, etc	
relay to 6to4 host	IPv4 Header	IPv6 Header	IPv6 Payload
	Src=192.88.99.1 Dst=203.0.113.5 Proto=41 (IPv6 encap)	Src=2001:db8:ab:cd::3 Dst=2002:cb00:7105:1::1	TCP, UDP, etc

[Migrating to IPv6, LOPSA-East 13]

127

6to4 Issues

- 6to4 can fail or perform poorly due to a variety of reasons:
 - Inbound/outbound blackholes (routers or firewalls filtering protocol 41, ICMP etc)
 - Lack of working return 6to4 relay
 - Circuitous/Asymmetric path with large round trip time
 - PMTU failures due to encapsulation overhead etc
- Privacy concerns with 3rd party relay routers
- See RFC 6343:Advisory Guidelines for 6to4 Deployment

[Migrating to IPv6, LOPSA-East 13]

128

Teredo

- Encapsulates IPv6 in UDP in IPv4 (see RFC 4380 for details)
- Works through NATs
- Special IPv6 prefix 2001::/32 (ie. 2001:0000::/32)
- Uses Teredo Servers and Teredo Relays

2001 : 0000 : **AABB : CCDD** : FFFF : aabb : **1122 : 3344**

server flags obfuscated port obfuscated client public IP

[Migrating to IPv6, LOPSA-East 13]

129


Teredo

- **Teredo Servers** are used for initialization, testing type of NAT, determining client's externally routable address, and for periodically maintaining state in NATs/firewalls
- **Teredo Relays** are used for relaying tunneled traffic to and from the IPv6 Internet

[Migrating to IPv6, LOPSA-East 13]

130

Teredo Diagram

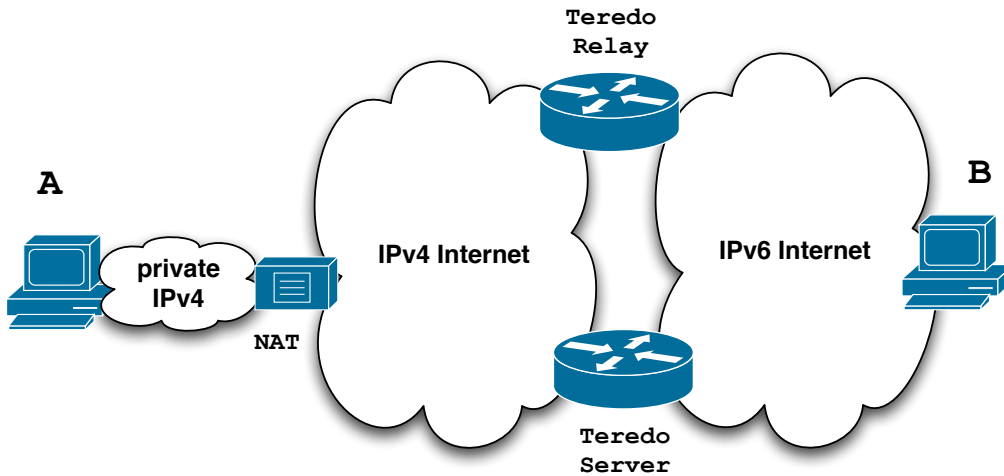

[Migrating to IPv6, LOPSA-East 13]

131

Teredo Issues

- Cannot work through some types of NAT (eg. Symmetric)
- NAT detection and traversal mechanisms employed have a significant impact on network performance
- Possible issues with inoperable Teredo servers and relays
- Privacy concerns with 3rd party servers and relays
- Security concerns have been expressed:
 - <http://tools.ietf.org/html/draft-ietf-v6ops-teredo-security-concerns-02>

[Migrating to IPv6, LOPSA-East 13]

132

Identifying tunneled traffic

- 6to4 uses well known prefix 2002::/16
- Teredo uses 2001::/32
- Both use value 41 (IPv6 encapsulation) in the IPv4 protocol field
- 6to4 encapsulates IPv6 packets directly in IPv4
- Teredo is encapsulated in UDP inside IPv4
- 6to4 commonly uses well-known anycast relay routers (192.88.99.0/24)
- There are also public Teredo servers and relays
- *Note: blindly blocking tunneled traffic may cause more harm than good*

[Migrating to IPv6, LOPSA-East 13]

133

Managed tunnels

- Statically configured, managed, IPv6 in IPv4 tunnels usually provide more predictable and more reliable service. A few managed tunnel providers
- Hurricane Electric: www.tunnelbroker.net
- Freenet6: www.hexago.com
- Consulintel: tb.consulintel.euro6ix.org
- Sixxs: www.sixxs.net

[Migrating to IPv6, LOPSA-East 13]

134

HE tunnelbroker example

Tunnelbroker Login

Username:

Password:

Hurricane Electric Free IPv6 Tunnel Broker

IPv6 Tunnel Broker

<http://tunnelbroker.net/>

Check out our new [usage stats!](#)

And then hit up our new [Forums!](#)

Welcome to the Hurricane Electric IPv6 Tunnel Broker! Our free tunnel broker service enables you to reach the IPv6 Internet by tunneling over existing IPv4 connections from your IPv6 enabled host or router to one of our IPv6 routers. To use this service you need to have an IPv6 capable host (IPv6 support is available for most platforms) or router which also has IPv4 (existing Internet) connectivity. Our tunnel service is oriented towards developers and experimenters that want a stable tunnel platform.

Advantages of using our tunnel service over others include:

- Run by a Business ISP with 24 x 7 staff at multiple locations and an International backbone ([find out more about IPv6 transit at Hurricane Electric](#))
- Ability to get your own /48 prefix once your tunnel is up
- Ability to get a full view of the IPv6 BGP4+ routing table
- Ability to use your tunnel now after a simple registration process. (It takes less than a minute.)
- Ability to create your tunnel on geographically diverse tunnel-servers (Fremont, CA; New York, NY; Dallas, TX; Chicago, IL; London, UK; Frankfurt, Germany; Paris, France; Amsterdam, NL; Miami, FL; Ashburn, VA; Seattle, WA; Los Angeles, CA; Hong Kong; Toronto, ON)

If you are a new user please register by clicking on Register below. After registering your password will be mailed to you and you can return here to activate your tunnel.

If you operate a network, run BGP, have your own ASN, and wish to announce IPv6 address space allocated directly to you by an RIR (ARIN, RIPE, APNIC, etc.) please select the "Create BGP Tunnel" option after you register.

Top 10 Certs

haritter	[1500]
cktsoi	[1500]
strehl	[1500]
solarken...	[1500]
johnpoz	[1500]
comptech	[1500]
jm493	[1500]
Belgarion	[1500]
mnalis	[1500]
vmaury	[1500]

Latest 10 Certs


rhwoolen	[Expl]
kryx0815	[Enth]
NwUsrTst	[Newb]
pmarseq	[Sage]
adlewis	[Admn]
spicert	[Expl]

[Mi]

135

Managed tunnel example

Tunnel providers endpoint: your ipv4 addr. if behind NAT, it's the externally visible address
IPv4: 203.0.113.1
IPv6: 2001:db8:ab:cd::1

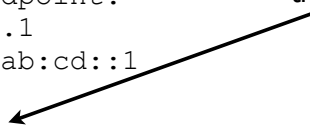Your endpoint:
IPv4: 192.0.5.2 
IPv6: 2001:db8:ab:cd::2

Prefix assignment: 2001:db8:ab:de::/64 (or /56, /48 etc)

```
ifconfig gif0 tunnel 192.0.5.2 203.0.113.1
ifconfig gif0 inet6 2001:db8:ab:cd::2 2001:db8:ab:cd::1 prefixlen 128
route -n add -inet6 default 2001:db8:ab:cd::1

$ ifconfig gif0
gif0: flags=8051<UP,POINTOPOINT,RUNNING,MULTICAST> mtu 1280
    tunnel inet 192.0.5.2 --> 203.0.113.1
    inet6 fe80::ca2b:a4ff:fe16:52c7%gif0 prefixlen 64 scopeid 0x2
    inet6 2001:db8:ab:cd::2 --> 2001:db8:ab:cd::1 prefixlen 128
```

[Migrating to IPv6, LOPSA-East 13]

136

Address Selection

[Migrating to IPv6, LOPSA-East 13]

137

DualStack Address Selection

- I'm a dual stack (IPv4/IPv6) client
- I lookup "www.example.com" eg. using **getaddrinfo()**
 - Performs both A and AAAA DNS queries and may return a list of various IPv4 and IPv6 addresses
 - Which should I try connecting to? In what order?

[Migrating to IPv6, LOPSA-East 13]

138

DualStack Address Selection

- RFC 6724: Default Address Selection Algorithm
 - Updated from the original RFC 3484
- Many rules, but one effect is to generally prefer IPv6 over IPv4

Type	Prefix	Precedence	Label
Loopback	::1/128	50	0
IPv6	::/0	40	1
IPv4	::ffff:0:0/96	35	4
6to4	2001::/16	30	2
Teredo	2001::/32	5	5
ULA	fc00::/7	3	13
Site Local	fec0::/10	1	11
6Bone	3ffe::/16	1	12

[Migrating to IPv6, LOPSA-East 13]

139

Happy Eyeballs

- RFC 6555, 6556: Happy Eyeballs: Success with Dual Stack Hosts
 - Parallel connections to v4 & v6 destinations, but give v6 a small headstart or pref. Use first connection that succeeds & cache results; tunable knobs
- Apple Mac OS X Lion:
 - Not quite Happy Eyeballs: no preference for IPv6 over IPv4; use what seems to work best, leading to more non-deterministic behavior
- Windows: <http://blogs.msdn.com/b/b8/archive/2012/06/05/with-ipv6-in-windows-8.aspx>
- Survey of what various OS and apps used to do/currently do (G. Huston, RIPE64): <https://ripe64.ripe.net/presentations/78-2012-04-16-ripe64.pdf>
- Traditional resolver vs “Connect-by-Name” APIs

[Migrating to IPv6, LOPSA-East 13]

140

Migration strategies for IPv6 services

- DualStack migration is the ideal, but has possible issues if broken IPv6 client connectivity is widespread
- An overview of some alternate strategies given here:
 - RFC 6589: Considerations for Transitioning content to IPv6
 - DNS Resolver Whitelisting; Resolver Blacklisting; IPv6 specific service names, etc

[Migrating to IPv6, LOPSA-East 13]

141

IPv6 and Security

[Migrating to IPv6, LOPSA-East 13]

142

IPv6 Security issues

- IPsec myth (IPv6 is automatically more secure because of IPsec)
- Code and implementations may not be as well tested in production and at scale, leading to bugs and possible security issues
- Lack of maturity of IPv6 support in (some) firewalls, VPNs, IDS, IPS
- Lack of DNS Block Lists, geolocation, reputation services
- Attack tools beginning to emerge
- Defensive (or offensive) network scanning: see RFC 5157
- State of support of PCI and other regulatory requirements

[Migrating to IPv6, LOPSA-East 13]

143

IPv6 Security issues

- How to correlate network addresses with users, in the face of auto-configuration, temporary addresses, larger address space per subnet
- Local subnet attacks - these are not qualitatively different from what we have in IPv4 today. See RFC 3756 for IPv6 ND based threats.
- Potential covert channel concerns
- Network scanning and router ND queue saturation (DoS)
 - See RFC 6583: Operational problems with neighbor discovery
- Good general discussion of issues and available solutions:
 - <https://wikispaces.psu.edu/display/ipv6/IPv6+security>

[Migrating to IPv6, LOPSA-East 13]

144

IPv6 Security issues

- Operational security considerations for IPv6 Networks:
 - <http://tools.ietf.org/html/draft-ietf-opsec-v6-00>
- Security concerns with native and tunneled traffic:
 - <http://tools.ietf.org/html/draft-ietf-opsec-ipv6-implications-on-ipv4-nets-00>
- Security implications of IPv6 fragmentation and ND:
 - <http://tools.ietf.org/html/draft-ietf-6man-nd-extension-headers-01>

[Migrating to IPv6, LOPSA-East 13]

145

ICMPv6 filtering

- ICMPv6 is critical to the operation of IPv6 networks
- Used for many functions: Neighbor discovery, router discovery, Path MTU discovery, multicast group membership management (MLD), Mobile IPv6, and more
- Don't blindly block ICMPv6
- RFC 4890: Recommendations for Filtering ICMPv6 Messages in Firewalls

[Migrating to IPv6, LOPSA-East 13]

146

Rogue RA issue

- Frequently observed phenomenon at some sites
- Most incidents appear to be unintentional misconfiguration rather than malicious
- Appears to be associated with Internet Connection Sharing features in some operating systems
- RFC 6104: Rogue RA problem statement
- Defenses: ACLs, RAGuard (RFC 6105), tweak default router preferences (RFC 4191)
- SeND (cryptographic protocol - challenging to deploy)

[Migrating to IPv6, LOPSA-East 13]

147

Rogue RA vs Rogue DHCP

- IPv4 has to deal with rogue DHCP servers
- Is the situation worse or better with IPv6?
- IPv6 has to deal with both rogue RA and rogue DHCP
- RAs can impact a larger number of hosts faster
- DHCP clients generally have to wait for lease timers to expire
- But, recovery/mitigation can be faster with RA

[Migrating to IPv6, LOPSA-East 13]

148

IPv6 Firewalls

- Stateful Firewalls
- Network vs host based firewalls
- RFC 6092: simple security in IPv6 residential CPE
 - by default block unsolicited incoming except IPsec
- Advanced security CPE?
 - <http://tools.ietf.org/html/draft-vyncke-advanced-ipv6-security-03>

[Migrating to IPv6, LOPSA-East 13]

149

IPv6 Firewalls

- Status of open source and commercial firewall implementations (Sep 2009, European Conference on Applied IPv6):
 - www.guug.de/veranstaltungen/ecai6-2007/slides/2007-ECAI6-Status-IPv6-Firewalling-PeterBieringer-Talk.pdf
- Survey of IPv6 Availability on Commercial Firewalls (ICANN, March 2010)
 - <http://www.icann.org/en/announcements/announcement-2-01mar10-en.htm>
- NSA Firewall Design Considerations (July 2010)
 - www.nsa.gov/ia/_files/ipv6/I733-04IR-2007.pdf

[Migrating to IPv6, LOPSA-East 13]

150

Microsoft recommendations

- IPv6 security considerations & recommendations (Aug 2011)
- <http://technet.microsoft.com/en-us/library/bb726956.aspx>
- Discusses SeND and DHCP Authentication, but states Microsoft doesn't support either
- Recommends IPsec: limited support in windows for IPv6 IPsec, but could protect tunneled IPv6 traffic with IPv4 + IPsec
- Recommends IPv6 capable firewalls, IDS, etc

[Migrating to IPv6, LOPSA-East 13]

151

~~Attack~~ Tools Vulnerability Assessment

- THC-IPv6: <http://freeworld.thc.org/thc-ipv6/>
- IPv6 Toolkit (SI Networks) <http://www.si6networks.com/tools/ipv6toolkit>
- scapy - packet manipulation tool
 - http://www.secdev.org/conf/scapy-IPv6_HITB06.pdf
- Note: attacks using IPv6 are already going on today; even on networks that haven't yet deployed IPv6
 - <http://tools.ietf.org/html/draft-gont-opsec-ipv6-implications-on-ipv4-nets-00>
 - RFC 6169: Security concerns with IPv6 tunneling

[Migrating to IPv6, LOPSA-East 13]

152

Attacks are happening

- IPv6 DDoS attacks observed on the Internet
 - 2012-02-22 Arbor: IPv6 sees first DDoS attacks
 - <http://www.h-online.com/security/news/item/Report-IPv6-sees-first-DDoS-attacks-1440502.html>
 - <http://www.zdnet.com/blog/networking/first-ipv6-distributed-denial-of-service-internet-attacks-seen/2039>
- Various forms of IPv6 malware
 - Using IPv6 as covert channel to communicate with botnet controller
 - including one that advertises a host as an IPv6 router and uses v4-v6 transition mechanisms to hijack both IPv4 and IPv6 traffic through it!

[Migrating to IPv6, LOPSA-East 13]

153

Troubleshooting tools

[Migrating to IPv6, LOPSA-East 13]

154

Troubleshooting Tools

- ifconfig
- tcpdump, wireshark, tshark
- ndp, ip -6, route, netstat, ...
- ping, ping6
- traceroute, traceroute6, tracert, tracepath6
- ndisc6 (ndisc6, rdisc6, tcptraceroute6, rdnsd)
- scamper - great for detecting PMTU blackholes in the network
- scapy - scriptable packet injection tool

[Migrating to IPv6, LOPSA-East 13]

155

Neighbor cache

```
MacOSX$ ndp -an
Neighbor                               Linklayer Address  Netif  Expire    St Flgs
Prbs
2607:f470:2f:1:215:4fff:fe01:33f8 0:15:4f:1:32:e8    en0    23h59m58s S
2607:f470:2f:1:218:f2ff:fe09:458c 0:18:f2:9:45:8c    en0    permanent R
fe80::1%lo0                          (incomplete)      lo0    permanent R
fe80::214:dfff:fe01:32f8%en0         0:14:4f:1:32:f9    en0    17h48m51s S
fe80::216:9cff:fe7f:53c0%en0        0:1e:9c:6f:53:c0    en0    17s      R  R
fe80::219:f2ff:fe09:458c%en0        0:1d:f2:9a:44:7c    en0    permanent R
```

```
Fedora-Linux$ ip -6 neigh show
fe80::216:9cff:fe6f:5dc0 dev eth0 lladdr 00:17:9c:6e:5d:c0 router STALE
2607:f470:2e:1:217:f2ff:fd09:458c dev eth0 lladdr 00:17:f2:09:4d:83 REACHABLE
fe80::21b:c000:1e83:b800 dev eth1 lladdr 00:1b:c0:84:b8:00 router STALE
```

```
Windows$ netsh interface show neighbors
```

[Migrating to IPv6, LOPSA-East 13]

156

netstat (mac)

```
MacOSX$ netstat -rn -f inet6
```

Destination	Gateway	Flags
Netif Expire		
default	fe80::216:9cff:fe6d:5ec1%en0	UGSc en0
::1	::1	UH lo0
2607:f470:2f:1::/64	link#4	UC en0
2607:f470:2f:1:217:f2ff:fe09:457c	0:17:fd:9:45:8c	UHL lo0
fe80::%lo0/64	fe80::1%lo0	Uc lo0
fe80::1%lo0	link#1	UHL lo0
fe80::%en0/64	link#4	UC en0
fe80::217:f2df:fe09:458c%en0	0:17:fd:9:45:8c	UHL lo0
ff02::/32	::1	UmC lo0
ff02::/32	link#4	UmC en0
ff02::fb	link#4	UHmLW en0

[Migrating to IPv6, LOPSA-East I3]

157

netstat (linux)

```
Linux$ netstat --protocol=inet6 -rn
```

Kernel IPv6 routing table

Destination	Flags	Metric	Ref	Use	Iface	Next Hop
2001:468:1800:501::/64						::
UA	256	1462		0	eth1	
2607:f470:2f:1:218:f2ff:fea9:358c/128						2607:f470:2d:1:217:f2ff:fea9:4d8c
UAC	0	8		1	eth0	
2607:f470:2f:1::/64						::
UA	256	3591		0	eth0	
fe80::/64						::
U	256	0		0	eth0	
fe80::/64						::
U	256	0		0	eth1	
::/0						fe80::216:9cff:fe6f:5ec0
UGDA	1024	11266		0	eth0	
::/0						fe80::21b:c000:1e83:bc00
UGDA	1024	1		0	eth1	
::1/128						::
U	0	14192		1	lo	
[... rest deleted ...]						

Also see: `ip -6 route show`, `route -A inet6`

[Migrating to IPv6, LOPSA-East I3]

158

IPv4 IPv6 Transition & Co-existence mechanisms

[Migrating to IPv6, LOPSA-East 13]

159

Transition/Co-existence

- The original IPv4-IPv6 transition and co-existence plan was based on the “Dual Stack” model.
- Since the dual stack transition has unfortunately failed to occur in a timely fashion, more drastic mechanisms are being developed and deployed.

[Migrating to IPv6, LOPSA-East 13]

160

Transition/Co-existence

- 6RD
- NAT64 and DNS64 (Note: NAT-PT deprecated by RFC 4966)
- IVI
- Dual Stack Lite (DS Lite)
- A+P
- 464XLAT

[Migrating to IPv6, LOPSA-East 13]

161

6rd (rapid deployment)

- RFC 5569: IPv6 Rapid Deployment on IPv4 infrastructures
- Essentially, a modified version of 6to4 Tunneling
- Managed by an ISP, using the ISP's prefix, rather than 2002::/16
- More predictable and reliable performance
- Easier to support by the ISP

[Migrating to IPv6, LOPSA-East 13]


162

DualStack Lite

- Combines **Native IPv6** and **tunneled IPv4 + centralized IPv4 NAT**
- No IP protocol family translation. Clients expected to be dualstack.
- CPE doesn't perform NAT function
- Share IPv4 addresses among **multiple** customers with a “**Carrier Grade NAT**” (**CGN**)
- Alternative to cascading NATs (NAT444 etc) for some ISPs
- Implications of address sharing
- <http://www.isc.org/software/aftr>

[Migrating to IPv6, LOPSA-East 13]

163

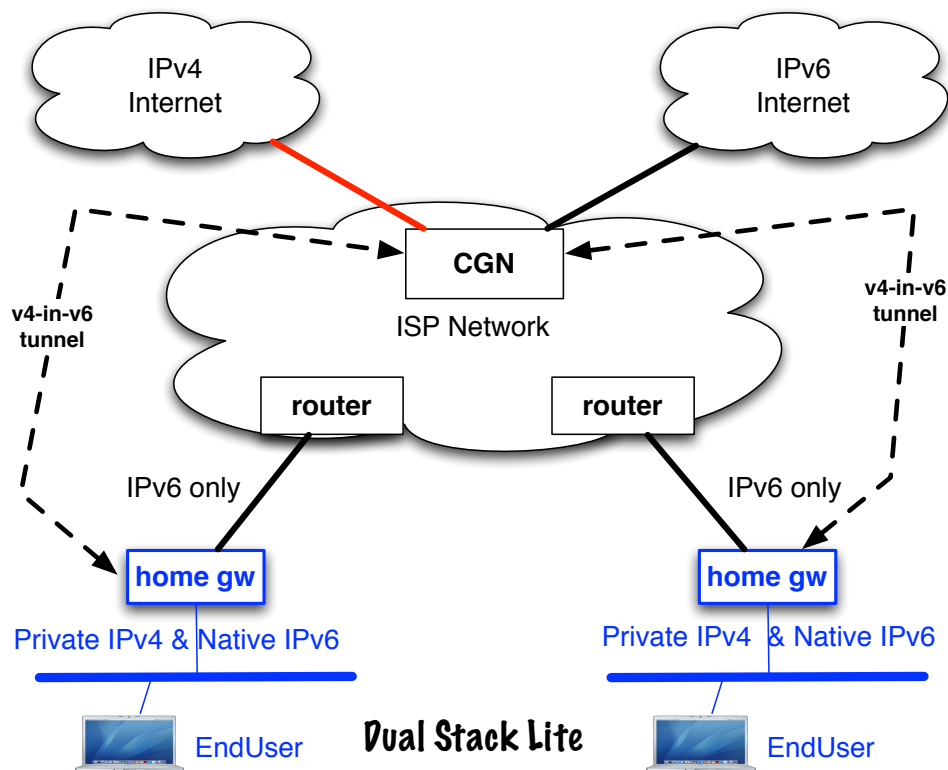

[Migrating to IPv6, LOPSA-East 13]

164

A+P (Address + Port)

- RFC 6346: The Address plus Port (A+P) Approach to the IPv4 Address Shortage (status: experimental)
- Similar in goals to Dual-Stack Lite, but absent some of the more nasty scalability limitations of carrier grade NATs
- Replace centralized CGN with an A+P gateway (non NAT)
- Return IPv4 NAT function to CPE, but constrain its port mapping to a subset of the 16-bit port space
- With the other bits identifying the CPE to the ISP network (ie. use a shared IPv4 address plus some port bits to identify the CPE)
- Tunnel CPE traffic over IPv6 to A+P gateway

[Migrating to IPv6, LOPSA-East 13]

165

MPLS and 6PE

- RFC 4659
- A possible transition mechanism for an ISP that hasn't fully deployed IPv6 in its core network
- Run IPv6 capable Provider Edge (PE) routers to peer natively with IPv6 customers and external peers
- Use BGP/MPLS VPN to forward traffic using MPLS over interior network that has IPv4 only core routers

[Migrating to IPv6, LOPSA-East 13]

166


NAT64, DNS64

- RFC 6052, 6144, 6145, 6146, 6147
- 6052: IPv6 addressing of IPv4/IPv6 translators
- 6145: IP/ICMP stateless translation
- NAT64: Stateful Network address and protocol translation **from IPv6 clients to IPv4 servers** (RFC 6146)
- Well known prefix: **64:ff9b::/96**
- DNS64: DNS extensions for NAT from IPv6 clients to IPv4 servers
 - synthesizes AAAA from A DNS records
- An open source implementation: <http://ecdysis.viagenie.ca/>

[Migrating to IPv6, LOPSA-East 13]

167

NAT64, DNS64

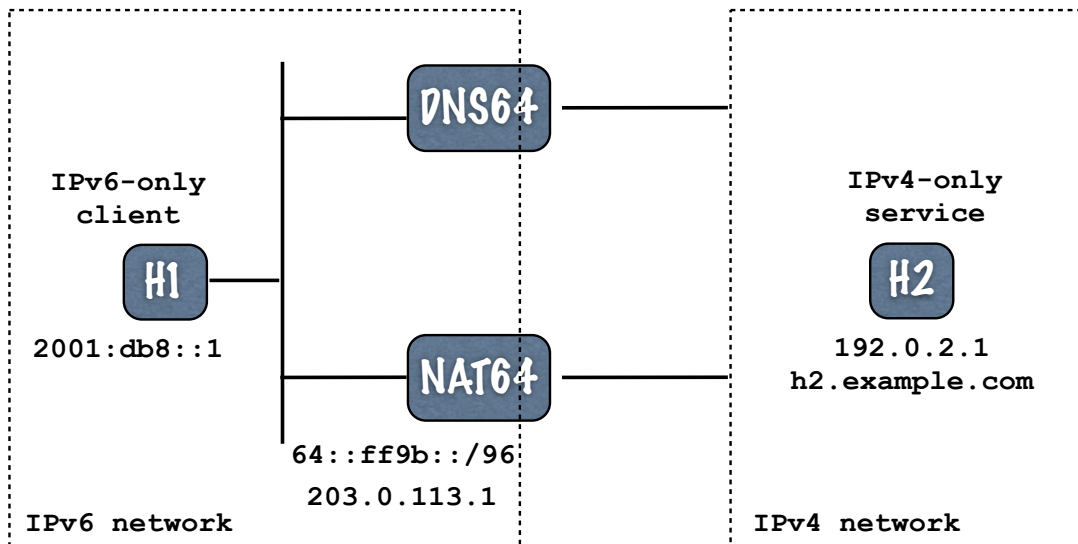

```
64:ff9b::192.0.2.1 <-- 192.0.2.1
h2.example.com IN AAAA 64:ff9b::192.0.2.1
```

[Migrating to IPv6, LOPSA-East 13]

168

NAT64, DNS64

IPv6-only client, H1 is attempting to reach IPv4-only webserver H2 (h2.example.com)

H1: perform DNS lookup of "h2.example.com" AAAA

DNS64: lookup h2.example.com, see that it only has an A record, convert the IPv4 address to 64:ff9b::192.0.2.1 and return that in the AAAA DNS answer

H1: send packet to 64:ff9b::192.0.2.1, port 80 from source 2001:db8::1, port 1500. Packet gets routed to NAT64 device

NAT64: select an unused port, say 2000, on its IPv4 address, 203.0.113.1 and create the NAT mapping between H1's source IPv6 address and port (2001:db8::1, 1500) and the NAT64's IPv4 address and selected port (203.0.113.1, 2000)

Translate IPv6 header into IPv4 header (using RFC 6145 algorithm)

Send translated packet with source 203.0.113.1, 2000 to destination 192.0.2.1, 80 (H2)

Return traffic:

H2: send packet from source 192.0.2.1, port 80 to 203.0.113.1, port 2000

NAT64: Receives packet, look for mapping entry for 203.0.113.1, port 2000

Finds (2001:db8::1, 1500 <-> 203.0.113.1, 2000)

Translate IPv4 header to IPv6 header

Send packet to H1 using source 64:ff9b::192.0.2.1, 80 and destination 2001:db8::1, 1500

[Migrating to IPv6, LOPSA-East 13]

169

IVI: RFC 6219

- IVI
- IV = 4, VI = 6, so IVI is IPv4 IPv6 transition
- Published as informational RFC 6219 (Not an IETF standard)
- Deployed in China's Research & Education Network, CERNET
- Working translator code for Linux


[Migrating to IPv6, LOPSA-East 13]

170

464XLAT

- 464XLAT: Combination of Stateful and Stateless Translation

[Trying to become an official wg document in softwires wg (2012-02)]

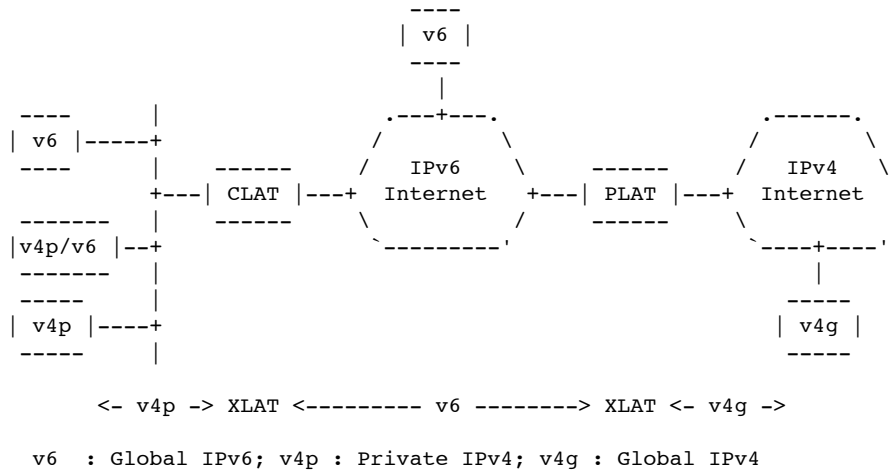

[Migrating to IPv6, LOPSA-East 13]

171

NAT444/CGN/LSN Issues

- NAT a single point of failure; easy DoS target etc
- Issues with address sharing across multiple customers (see RFC6269)
- Broken applications;ALGs complex, NAT traversal methods don't always work reliably
- Network management, troubleshooting, auditing is more difficult
- Broken location aware services
- Poor performance and/or reliability (overloaded/malfunctioning middleboxes)
- <http://tools.ietf.org/html/draft-donley-nat444-impacts-05>
- DNSSEC issues (with DNS64 AAAA record synthesis)

[Migrating to IPv6, LOPSA-East 13]

172

NPTv6 (formerly NAT66)

- Technically no NAT in IPv6, but ...
- RFC 6296: NPTv6: **IPv6 to IPv6 Network Prefix Translation** (status: **Experimental**)
- Works very differently from v4-v4 NAT/NAPT
 - Stateless 1:1 **prefix** translation
 - goal: address independence & easier multihoming (see related draft on multi-homing with NPTv6)
- Alleged security properties of NAT can be better achieved with stateful firewalls -- see RFC 4864 (Local network protection for IPv6) for details

[Migrating to IPv6, LOPSA-East 13]

173

Multicast Transition

- Multicast IPv4-IPv6 transition mechanisms - new work in the IETF

[Migrating to IPv6, LOPSA-East 13]

174

Parting advice for IPv6 deployers

[Migrating to IPv6, LOPSA-East 13]

175

Preparing for IPv6

- Starting early is better
- Develop a deployment plan
- Training for your staff and users
- Ordering/updating hardware & software
- Installing/testing/debugging hardware and software
 - On both server and client side

[Migrating to IPv6, LOPSA-East 13]

176

Programming

[Migrating to IPv6, LOPSA-East 13]

177

Socket API extensions

- RFC 3493: Basic Socket Interface Extensions for IPv6
- New socket address structures, new address conversion functions, new socket options
- Also see RFC 4038: Application Aspects of IPv6 Transition
- RFC 5014: IPv6 Socket API for Source Address Selection

[Migrating to IPv6, LOPSA-East 13]

178

Socket API extensions

IPv6 address structure:

```
struct in6_addr {
    uint8_t          s6_addr[16];    /* IPv6 address */
};

struct sockaddr_in6 {
    unsigned short int sin6_family;   /* AF_INET6 */
    in_port_t          sin6_port;     /* L4 port */
    uint32_t           sin6_flowinfo; /* flow info */
    struct in6_addr    sin6_addr;     /* IPv6 address */
    uint32_t           sin6_scope_id; /* scope id */
};
```

The flowinfo and scope_id fields are new. in6_addr is actually defined in terms of unions for alignment purposes.

[Migrating to IPv6, LOPSA-East 13]

179

Socket API extensions

New versions of functions that translate names to/from addresses and between numeric and textual address forms. Take an address family arg(AF_INET, AF_INET6, AF_UNSPEC)

IPv4	IPv4 & IPv6
gethostbyname()	getaddrinfo()
gethostbyaddr()	getnameinfo()
inet_ntoa()	inet_ntop()
inet_addr()	inet_pton()

[Migrating to IPv6, LOPSA-East 13]

180

Socket API extensions

Note: if IP address family is unspecified, `getaddrinfo()` on most platforms returns its list of addresses sorted in the order dictated by the default address selection algorithm. But note the presence of newer "Happy Eyeballs" style algorithms.

```
$ python
>>> import socket
addrinfo_list = socket.getaddrinfo("www.ucla.edu", 80,
                                   socket.AF_UNSPEC, socket.SOCK_STREAM)
>>> for (fam, stype, proto, canon, saddr) in addrinfo_list:
...     print saddr[0]
...
2607:f010:3fe:201:0:ff:fe01:32
2607:f010:3fe:101:0:ff:fe01:32
169.232.33.224
169.232.55.224
```

Returns 4 addresses, with the IPv6 addresses first.

Client applications (normally) should implement code to loop through the various addresses returned by `getaddrinfo()` until they succeed in establishing a connection.

[Migrating to IPv6, LOPSA-East 13]

181

Socket API extensions

Replace:

```
socket(AF_INET, SOCK_STREAM, 0)      # TCP socket
socket(AF_INET, SOCK_DGRAM, 0)      # UDP socket
```

with:

```
socket(AF_INET6, SOCK_STREAM, 0)
socket(AF_INET6, SOCK_DGRAM, 0)
```

`sockaddr_in6` structures will be used. These structures are passed as opaque pointers (`sockaddr`) in socket functions. And other functions like `bind()`, `connect()`, `sendmsg()`, `sendto()`, `accept()`, `recvfrom()`, `recvmsg()`, `getpeername()`, `getsockname()`, etc can mostly be used unchanged.

[Migrating to IPv6, LOPSA-East 13]

182

Socket options

New socket options that can be used by the `setsockopt()` and `getsockopt()` functions:

```
IPV6_UNICAST_HOPS      #set unicast hoplimit (TTL)
IPV6_MULTICAST_IF      #set outgoing interface for multicast
IPV6_MULTICAST_HOPS    #set hoplimit for outgoing multicast
IPV6_MULTICAST_LOOP    #loop back multicast to myself
IPV6_JOIN_GROUP        #join multicast group on interface
IPV6_LEAVE_GROUP       #leave multicast group
IPV6_V6ONLY            #restrict socket to IPv6 only
```

The "IPPROTO_IPV6" level constant must be used. Example:

```
int hoplimit = 20;
if (setsockopt(s, IPPROTO_IPV6, IPV6_UNICAST_HOPS,
              (char *) &hoplimit, sizeof(hoplimit)) == -1)
    perror("setsockopt IPV6_UNICAST_HOPS");
```

[Migrating to IPv6, LOPSA-East 13]

183

IPv4 compatibility

IPv6 applications can interoperate with IPv4 nodes using the **IPv4-mapped IPv6 address format**, `::ffff:0:0/96` where the IPv4 address is encoded in the last 32 bits, eg:

```
::ffff:192.168.1.2
```

Applications can use IPv6 sockets to communicate with IPv4 systems by encoding their IPv4 addresses in this format. When IPv6 sockets receive packets from IPv4 nodes, socket functions that return peer addresses will automatically represent them as IPv4-mapped IPv6 addresses.

To restrict a socket to IPv6 packets only, set the `IPV6_V6ONLY` socket option via:

```
setsockopt(s, IPPROTO_IPV6, IPV6_V6ONLY, ...)
```

[Migrating to IPv6, LOPSA-East 13]

184

Advanced extensions

- RFC 3542: Advanced Sockets API for IPv6
- Defines additional functions that deal with more detailed IPv6 information, such as access to variety of IPv6 and ICMPv6 header fields, extension headers, send & receive interfaces, “raw” sockets, path MTU, etc.
- “Ancillary Data” framework to exchange additional information between kernel and application

[Migrating to IPv6, LOPSA-East 13]

185

A small example program

Small demonstration client & server program written in Python. C and perl code are similar. I chose Python for this because it is more compact, readable and resembles pseudo-code.

It's a TCP echo server and client. The server simply echos back whatever the client writes to it. The server can handle both IPv6 and IPv4 connections. The client uses getaddrinfo to obtain all the addresses (IPv4 & IPv6) associated with the server name and tries them in order until one succeeds in connecting.

The server is started with a specified port number:
`./echoserver 8080`

The client is started with the server name, port & a string:
`./echoclient server.example.com 8080 Hello`

[Migrating to IPv6, LOPSA-East 13]

186

echoserver

```
#!/usr/bin/env python
import sys, socket

try:
    PORT = int(sys.argv[1])
except:
    print "Usage: echo6server <port>"
    sys.exit(1)

s = socket.socket(socket.AF_INET6, socket.SOCK_STREAM, socket.IPPROTO_TCP)
s.setsockopt(socket.SOL_SOCKET, socket.SO_REUSEADDR, 1)
s.bind('', PORT)
s.listen(2)

print "Listening on port %d" % PORT
while True:
    conn, addr = s.accept()
    print 'Connection on: ', addr
    data = conn.recv(1024)
    conn.send(data)
    conn.close()
```

[Migrating to IPv6, LOPSA-East 13]

187

echoclient

```
#!/usr/bin/env python

import os, sys, socket, time
try:
    HOST, PORT, MSG = sys.argv[1:]
    PORT = int(PORT)
except:
    print "Usage: echo6client <host> <port> <message>"; sys.exit(1)

ai_list = socket.getaddrinfo(HOST, PORT, socket.AF_UNSPEC, socket.SOCK_STREAM)
for ai in ai_list:
    family, socktype, proto, canonname, sockaddr = ai
    addr, port = sockaddr[0:2]
    try:
        s = socket.socket(family, socktype, proto)
    except socket.error, diag:
        continue
    try:
        s.connect(sockaddr)
        s.send(MSG)
        data = s.recv(1024)
        print 'Received: %s' % data
        s.close()
    except socket.error, diag:
        s.close()
        continue
    break
```

[Migrating to IPv6, LOPSA-East 13]

188

Routing Protocols

[Migrating to IPv6, LOPSA-East 13]

189

IPv6 Routing

- Interior Routing (IGP):
 - **OSPF** version 3 (RFC 5340) - brand new version of protocol
 - **Integrated IS-IS** (RFC 5308) - 2 new TLVs
 - Other options: **RIPng** (seldom used in most real networks), **EIGRP** (cisco proprietary)
- Exterior Routing (EGP):
 - **BGP-4** with Multi-protocol extensions
 - MP-(UN)REACH-NLRI attributes that support IPv6

[Migrating to IPv6, LOPSA-East 13]

190

IPv6 Multicast Routing

- PIM (usually PIM-SM: PIM Sparse Mode)
- BGP-4 Multi-protocol Extensions
- No MSDP (Multicast Source Discovery Protocol) exists
 - Static Rendezvous Points shared across domains
 - “Embedded RP” (RFC 3956)
 - Or if possible use Source Specific Multicast (SSM) and obviate the need for source discovery

[Migrating to IPv6, LOPSA-East 13]

191

A few brief router configuration examples

[Migrating to IPv6, LOPSA-East 13]

192

We'll show examples of configuring two of the more popular router platforms: Cisco IOS and Juniper JunOS.

Note: These examples work on most recent versions of IOS and JunOS as of the time of this writing. Occasionally router configuration commands and syntax change between operating system releases, so please confirm against your relevant documentation before trying these.

[Migrating to IPv6, LOPSA-East 13]

193

Cisco IOS: OSPFv3

```
ipv6 unicast-routing
```

```
interface Loopback0  
  ipv6 address 2001:db8:ab:1::1  
  ipv6 ospf 2 area 0
```

```
interface FastEthernet0/0  
  ipv6 address 2001:db8:ab:2::1  
  ipv6 ospf 2 area 0  
  ipv6 ospf cost 10
```

```
ipv6 router ospf 2
```

[Migrating to IPv6, LOPSA-East 13]

194

Cisco IOS: IS-IS

```
ipv6 unicast-routing

interface Loopback0
  ipv6 address 2001:db8:ab:1::1

interface FastEthernet0/0
  ipv6 address 2001:db8:ab:2::1
  ipv6 router isis

router isis
  net 49.0001.1921.6805.2001.00
  is-type level-2-only
  metric-style wide
  metric 1000
  passive-interface Loopback0
```

[Migrating to IPv6, LOPSA-East 13]

195

Cisco IOS: BGP

```
router bgp 65000
  no synchronization
  neighbor 2001:DB8:5:28::2 remote-as 1111
  no neighbor 2001:DB8:5:28::2 activate
  no auto-summary
  address-family ipv6
    neighbor 2001:DB8:5:28::2 activate
    neighbor 2001:DB8:5:28::2 soft-reconfiguration inbound
    aggregate-address 2001:DB8:5:E160::/61 summary-only
    redistribute connected
    redistribute static
    redistribute isis level-2
    no synchronization
  exit-address-family
```

[Migrating to IPv6, LOPSA-East 13]

196

Cisco IOS: autoconfig

```
(config-if)#ipv6 nd ?
dad                Duplicate Address Detection
managed-config-flag Hosts should use DHCP for address config
ns-interval        Set advertised NS retransmission interval
nud                Neighbor Unreachability Detection
other-config-flag  Hosts should use DHCP for non-address config
prefix             Configure IPv6 Routing Prefix Advertisement
ra                 Router Advertisement control
reachable-time     Set advertised reachability time
router-preference  Set default router preference value

interface FastEthernet0/0
ipv6 address 2001:DB8:AB:2::1/64
ipv6 nd ra interval 300
ipv6 nd prefix default 3600 1800    #valid,preferred lifetimes
ipv6 nd ra lifetime 1800
ipv6 nd other-config-flag          #other config via stateless dhcp
no ipv6 redirects
```

[Migrating to IPv6, LOPSA-East 13]

197

Cisco IOS: dhcpv6

```
interface FastEthernet0/0
ipv6 address 2001:DB8:AB:2::1/64
ipv6 nd ra interval 300
ipv6 nd prefix default 3600 1800 no-autoconfig
ipv6 nd ra lifetime 1800
ipv6 nd managed-config-flag
ipv6 nd other-config-flag
ipv6 dhcp relay destination 2001:DB8:CD:3::3
```

[Migrating to IPv6, LOPSA-East 13]

198

JunOS: OSPFv3

```
routing-options {
  router-id 192.168.1.1
}

protocols {
  ospf3 {
    area 0.0.0.0 {
      interface lo0.0 {
        passive;
      }
      interface ge-0/0/0.0;
      interface ge-1/1/3.0;
    }
  }
}
```

[Migrating to IPv6, LOPSA-East 13]

199

JunOS: IS-IS

```
[edit interfaces]
ge-0/0/0 {
  unit 0 {
    family iso;
    family inet6 {
      address 2001:db8:1800:0501::1/64;
    }
  }
lo0 {
  unit 0 {
    family iso {
      address 49.0001.1921.6804.2009.00;
    }
    family inet6 {
      address 2001:db8:1800:0500::1/128;
    }
  }
}
```

[Migrating to IPv6, LOPSA-East 13]

200

JunOS: IS-IS

```
[edit protocols isis]
isis {
  reference-bandwidth 1000g;
  level 2 {
    wide-metrics-only;
  }
  interface ge-0/0/0.0 {
    level 1 disable;
    level 2 passive;
  }
  interface all {
    level 1 disable;
  }
  interface lo0.0 {
    level 1 disable;
    level 2 passive;
  }
}
```

[Migrating to IPv6, LOPSA-East 13]

201

JunOS: BGP

```
[edit protocols]

bgp {
  group ISP1_PEERING {
    type external;
    description "External BGP peering with ISP1";
    family inet6 {
      unicast;
      multicast;
    }
    export OUTBOUND-ISP1;           # filters routes we
                                   # send to ISP1
    peer-as 65001;
    neighbor 2001:db8:cd:2::1;
  }
}
```

[Migrating to IPv6, LOPSA-East 13]

202

JunOS: autoconfig

```
[edit protocols]
```

```
router-advertisement {  
  interface ge-0/0/0.5 {  
    other-stateful-configuration;  
    prefix 2001:db8:1800:505::/64 {  
      valid-lifetime 3600;  
      preferred-lifetime 1800;  
    }  
  }  
}
```

```
# the "other-stateful-configuration" option is to instruct  
# autoconfigured clients to obtain non-address parameters  
# (eg. dns, ntp, etc settings) via stateless DHCPv6.
```

[Migrating to IPv6, LOPSA-East 13]

203

JunOS: stateful dhcpv6

```
[edit protocols]
```

```
router-advertisement {  
  interface ge-0/0/0.5 {  
    managed-configuration;  
    other-stateful-configuration;  
    prefix 2001:db8:1800:505::/64 {  
      no-autonomous;  
    }  
  }  
}
```

[Migrating to IPv6, LOPSA-East 13]

204

JunOS: stateful dhcpv6

```
[edit forwarding-options dhcp-relay]

server-group {
  servers1 {
    2001:db8:1802:9405::7;
  }
}
group group1 {
  active-server-group servers1;
  interface ge-0/0/0.5;
  interface ge-0/0/0.6;
}
```

[Migrating to IPv6, LOPSA-East 13]

205

Other Network things

[Migrating to IPv6, LOPSA-East 13]

206

Traffic characterization

- Netflow version 9 supports IPv6 flow export, and is implemented by both Cisco and Juniper routers
- IPFIX: IETF's standardized flow export protocol (based on Netflow v9)

[Migrating to IPv6, LOPSA-East 13]

207

Network Management

- SNMP (Simple Network Management Protocol) over IPv6 - transport mappings defined in RFC 3419 for both IPv4 and IPv6
- Some older IPv6-specific SNMP MIBs exist
- Newer Unified SNMP MIBs: support both IPv4 and IPv6
 - RFC 4001, 4292, 4293, 4022, 4113
- Not all network equipment vendors support the newer unified MIBs yet
- NETCONF (RFC 6241) - XML based network configuration protocol also can run over IPv6

[Migrating to IPv6, LOPSA-East 13]

208

References

[Migrating to IPv6, LOPSA-East 13]

209

References

- <http://www.internetsociety.org/deploy360/ipv6/>
- http://www.getipv6.info/index.php/Main_Page
- <http://www.ietf.org/> (hundreds of protocol specs!)
- <http://ipv6.com/>
- https://www.arin.net/resources/request/ipv4_depletion.html
- <https://www.arin.net/knowledge/v4-v6.html>
- “Migrating to IPv6: A practical guide ..” - M. Blanchet (2006)

[Migrating to IPv6, LOPSA-East 13]

210

Questions?



Shumon Huque
shuque -@- upenn.edu

Please fill out the Trainer Evaluation
<http://lopsa-east.org/2013/training-survey>

Rate LOPSA-East '13
<http://www.lopsa-east.org/2013/rate-lopsa-east-13>

[Migrating to IPv6, LOPSA-East 13]

